


Anti-interference filter

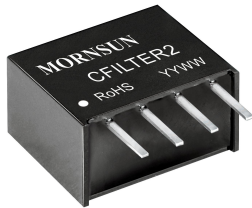

Patent Protection **RoHS**

The series applies to analog circuits which are more sensitive to noise, and other occasions. If added a CFILTER2 input to the module, the output noise can be reduced substantially.

FEATURES

- Compact size
- International standard pin-out
- UL94-V0 Package


Selection Guide

Part Number	Inductance value (μH)(Min./Typ.)	Rated current (A)(max)	DCR(Ω)(Max)	Weight (g)(typ)
CFILTER2	1065*2/1500*2 (Ta=25°C)	0.6	0.2	1.8


General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		-40	--	105	°C
Storage Temperature		-55	--	125	
Pin Welding Resistance	1.5mm from case for 10 seconds	--	--	300	
Storage Humidity		5	--	95	%RH


Schematic diagram of pin function

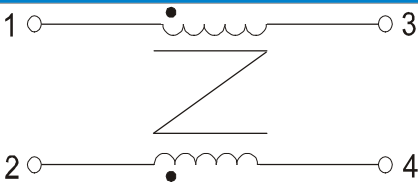

CFILTER2 Insertion Loss Specifications (reference value)

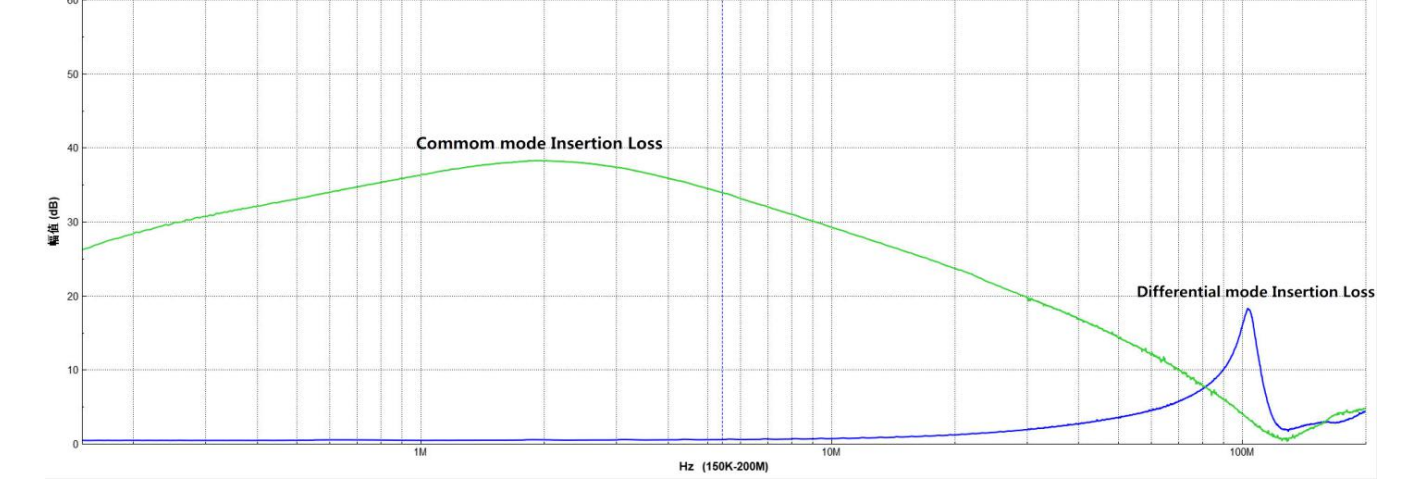

Dimensions and Recommended Layout

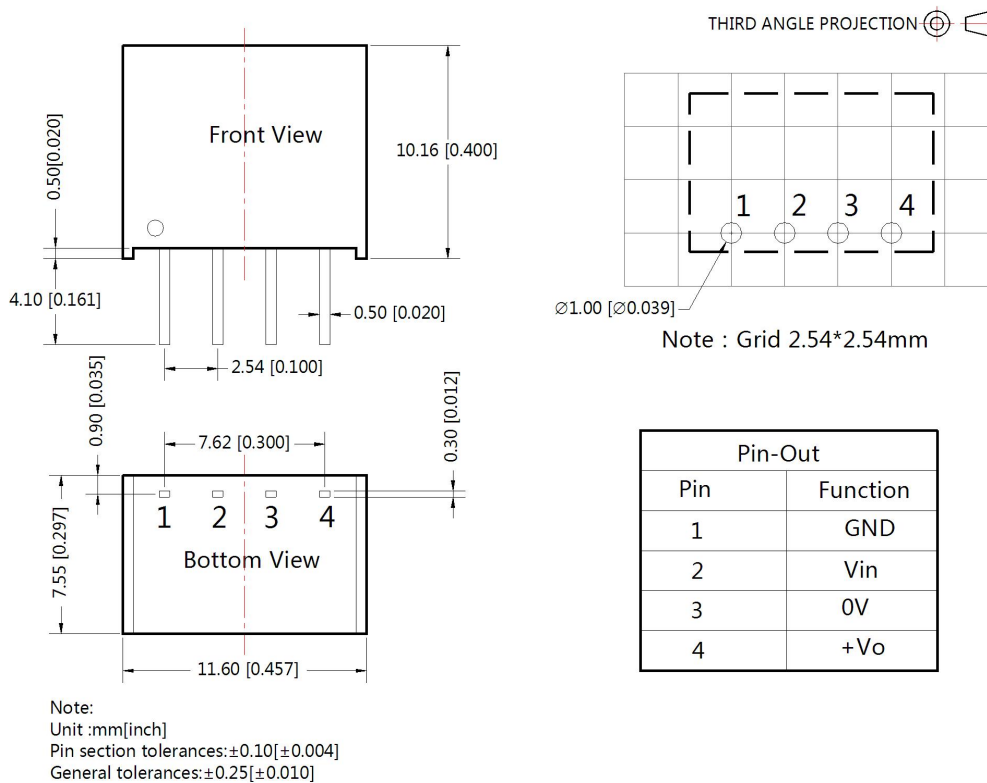

Notes:

1. **Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com.**
Packing bag number: 58200003; ;
2. Unless otherwise specified, **parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75% RH;**
3. All index testing methods in this datasheet are based on our Company' s corporate standards;
4. **The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above.** Please contact our technicians directly for specific information;
5. We can provide product customization service;

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com