



FEATURES

- Ultra-wide 85 - 305VAC and 120 - 430VDC input voltage range
- Typical efficiency up to 92%, power factor up to 0.99
- International standard half brick package
- Compact size, high power density
- Over temperature protection, input reverse polarity protection, output over-voltage/over-current/ short circuit protection
- Designed to meet UL/IEC62368 standards

LBH150-13Bxx series is a new generation product of Mornsun's ultra compact size and highly efficient green power converter. It is a standard half brick package size with ultra-wide input voltage, high efficiency, high reliability and reinforced isolation. The products are safe and reliable with good EMC performance, the safety specifications meet the international UL/IEC/EN62368 standards. They are widely used in switching equipment, access equipment, mobile communications, microwave communications, optical transmission, routers and other areas of the communication, as well as electronics and mechanical equipment etc. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current(Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
EN	LBH150-13B12	150	12V/12.5A	92	4000
	LBH150-13B24		24V/6.25A	92	1500
	LBH150-13B28		28V/5.36A	92	1500
	LBH150-13B48		48V/3.13A	92	470
	LBH150-13B54		54V/2.78A	92	470

Note: The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	120	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	2	A
	230VAC	--	--	1	
Inrush Current	230VAC, Ta=25℃	--	--	30	
Power Factor*	50/60Hz, 115VAC/230VAC, Pout=150W	0.96	0.99	--	--
THD*	Ta=25℃, Vin=115/230V, Pout=150W	--	5	--	%
Input Under-voltage Protection	Under-voltage protection start (Input voltage drops from high to low)	70	--	80	VAC
	Under-voltage protection release (Input voltage rises from low to high)	75	--	85	
Recommended External Input Fuse		3.15A/300V, slow-blow, required			
Hot Plug		Unavailable			
Grounded Mode	PE is required for aluminum substrate application				

Note: *The power factor and THD test result are based on recommended circuit.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	--	±2	--	%
Line Regulation	Rated load	--	±0.5	--	
Load Regulation	0% - 100% load	--	±0.1	--	
Minimum Load		0	--	--	

AC/DC 150W Brick Converter

LBH150-13Bxx Series

MORNSUN®

Ripple & Noise*	20MHz bandwidth (peak-to-peak value) Load at room temperature >20%	12V	--	100	150	mV
		24V	--	200	250	
		28V	--	200	300	
		48V	--	300	400	
		54V	--	300	400	
Temperature Coefficient			--	±0.02	--	%/°C
Stand-by Power Consumption			--	2	4	W
Hold-up Time			--	8	--	ms
Short Circuit Protection			Hiccup, continuous, self-recover			
Over-current Protection			120% Io, self-recover after fault disappear			
Over-voltage Protection	12VDC output		≤16VDC (Hiccup)			
	24VDC output		≤32VDC (Hiccup)			
	28VDC output		≤35VDC (Hiccup)			
	48VDC output		≤60VDC (Hiccup)			
	54VDC output		≤63VDC (Hiccup)			
No-load Output Of Auxilliary Source	Maximum pulling current about 10mA, take HU- as for reference ground (Internal resistor in series 1 k Ω)	8	12	15		V
Over Temperature Protection	Over-temperature protection start (Aluminum substrate temperature) until power off	105	--	115		°C
	Over-temperature protection recovery	Reset input				
ENA Remote Control ON/OFF	Enable control pin	ENA connect to HU- , output is normal				
		ENA disconnect to HU- , output turn off				

Note: *The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input - Output	Electric Strength Test for 1min., leakage current <10mA	3000	--	--	VAC
	Input - PE		1500	--	--	
	Output - PE		1500	--	--	
Insulation Resistance	Input - Output	Test Voltage: 500VDC, Ta=25℃	100	--	--	M Ω
	Input - PE		100	--	--	
	Output - PE		100	--	--	
Operating Temperature		Al-Substrate temperature	-40	--	+100	℃
Storage Temperature			-40	--	+100	
Storage Humidity		Non-condensing	--	--	95	%RH
Soldering Temperature		Wave-soldering, Max. 10 seconds	255	260	265	℃
		Manual-welding, Max. 10 seconds	350	360	370	
Power Derating		+90℃ to +100℃ (Al-Substrate temperature)	1.67	--	--	%/℃
		85VAC - 100VAC	1.33	--	--	%/VAC
Safety Standard			BS EN/EN62368-1 safety approved; Design refer to UL/IEC62368-1			
Safety Class			CLASS I			
MTBF		MIL-HDBK-217F@25℃	≥300,000 h			
		Telcordia SR-332@25℃	≥1500,000 h			

Environmental Characteristics

Item	Operating Conditions	Standard
Low Temperature Working	-40°C	GB2423.1, IEC60068-2-1
High Temperature Working	+85°C	GB2423.2, IEC60068-2-2
Low Temperature Storage	-40°C	GB2423.1, IEC60068-2-1

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2025.05.15-A/6

Page 2 of 18

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

High Temperature Storage	+85℃	GB2423.2, IEC60068-2-2
Sinusoidal Vibration	Direction of Z axis: 120-2000Hz, 3.04mm, 10g; two direction of X, Y, axis: 20-2000Hz, 3.04mm, 20g	GB2423.10, IEC60068-2-6
Temperature Shock	-40℃ to +100℃	GB2423.22, IEC60068-2-14
Temperature Cycle	-40℃ to +50℃	GB2423.22, IEC60068-2-14
Hot and Humid	+85℃, 85%RH	GB2423.50, IEC60068-2-67

Mechanical Specifications


Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)	
Dimension	Horizontal package	63.14 x 60.60 x 12.70mm
Weight	Horizontal package	140g (Typ.)
Cooling Method	Using from the Al-Substrate to additional heat radiation of the radiator cooling	

Electromagnetic Compatibility (EMC) (Based on recommended circuit)*

Emissions	CE	CISPR32/EN55032 CLASS A	
		CE102 GJB151B (See Fig. 2 for recommended circuit)	
	RE	CISPR32/EN55032 CLASS A	
	Harmonic current	IEC/EN61000-3-2 CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s perf. Criteria A
	Voltage variation**	IEC61000-6-2/IEC 61000-4-11	70% Un, 25/30 cycle(50/60Hz) 40% Un, 10/12 cycle(50/60Hz) 0% Un, 1 cycle perf. Criteria B
	Voltage interruption**	IEC61000-6-2/IEC61000-4-11	0% Un, 250/300 cycle(50/60Hz) perf. Criteria C

Note: 1. *Except for CE102 of the CE, other EMC test results are based on recommended circuit 1.
2. **Un is the maximum input nominal voltage.

Product Characteristic Curve

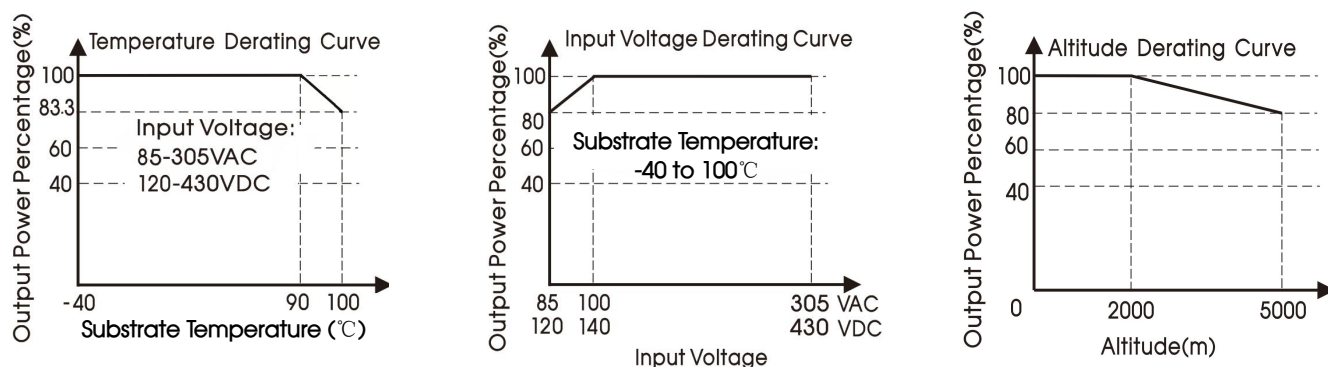

Note:

- ① With an AC input voltage between 85 - 100VAC/120 - 140VDC the output power must be derated as per the temperature derating curves;
- ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

Additional Circuits Design Reference

1. Typical application

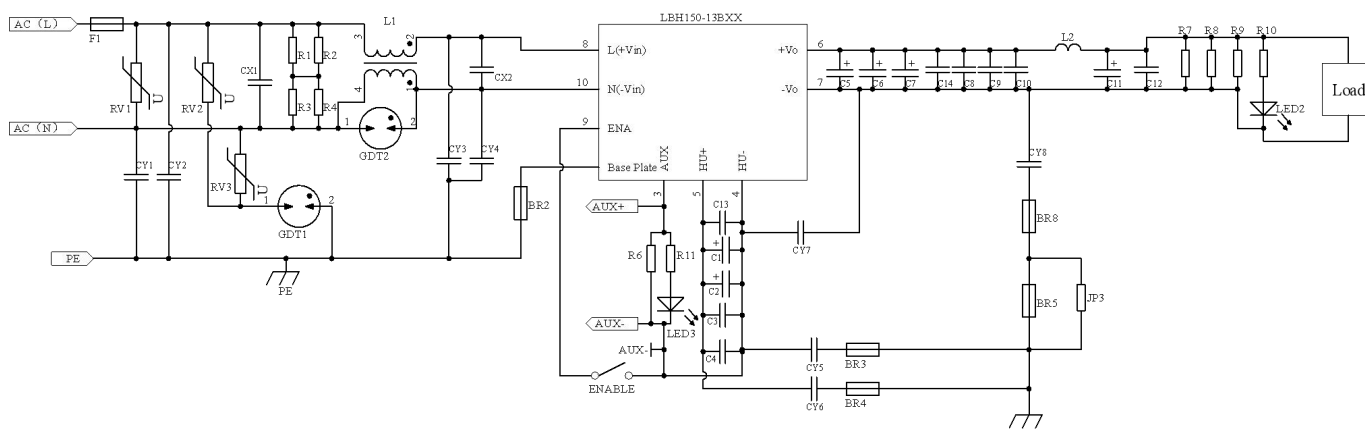


Fig. 1: Recommended circuit 1

Required Component		
Component		Recommended value
F1		3.15A/300VAC, slow-blow
L1		10mH/145mΩ, Max/3A (recommend MORNSUN P/N: FL2D-30-103)
C1/C2		82uF/450V (C1+C2≤200uF)*
CX1/CX2		105K/310VAC
C14	12V	106K/1206/25V (Optional)
	24V/28V	105K/1206/50V (Optional)
	48V/54V	104K/1206/100V (Optional)
R6		10KΩ /1206
LED2/LED3		GreenYellow/5V/30mA/Φ 3.1mm (Optional)
R10	12V	5.6KΩ /1206 (Optional)
	24V/28V	10KΩ /1206 (Optional)
	48V/54V	27KΩ /1206 (Optional)
R11		5.6KΩ /1206 (Optional)
C5/C6/C7/C11	12V	1000uF/16V (solid-state capacitor)
	24V/28V	470uF/35V
	48V/54V	220uF/63V
C8/C9/C10/C12	12V	106K/1206/25V
	24V/28V	105K/1206/50V
	48V/54V	104K/1206/100V
L2	12V	0.39uH/1.15mΩ /24A (Recommended RKR0415A-R39M of CODACA)
	24V/28V/48V/54V	0.8uH/4mΩ Max/15A (Recommended HCRC0415T-R80M of HUASUN)
R7	12V	1KΩ /1206
	24V	3.83KΩ /1206
	28V	6.8KΩ /1206
	48V	20KΩ /1206
	54V	33KΩ /1206
R8	12V	1KΩ /1206
	24V	3.83KΩ /1206
	28V/48V/54V	NC

R9	12V	1K Ω /1206
	24V	3.83K Ω /1206
	28V/48V/54V	NC

Note: ① *C1+C2 total value exceeds specifications, these is a risk of damage to the product;
 ② R7/R8/R9 can be replaced by a single 2W plug-in wind-wound resistor with the same resistance as R7/R8/R9 after parallel equivalence.

EMC Component	
Component	Recommended value
RV2/RV3	S14K300/4500A
RV1	S14K350/4500A
GDT1	3.6KV/3KA
GDT2	300V/1KA
R1/R2/R3/R4	2M Ω /120 ϕ
CY3/CY4/CY5/CY6/CY7	Y1/102M/400VAC
CY8	Y1/222M/400VAC
BR2/BR3/BR4/BR5	4*3.1*2.6/47 Ω /100MHz/DCR 0.004 Ω Max (Multilayer Chip Bead, recommended HCB403026-470Y of HUASUN)
C3/C4	683K/1210
C13	683K/1210 (Optional)
BR8	NC
JP3	NC
CY1/CY2	NC

2. Conducted emission (CE102) recommended circuit


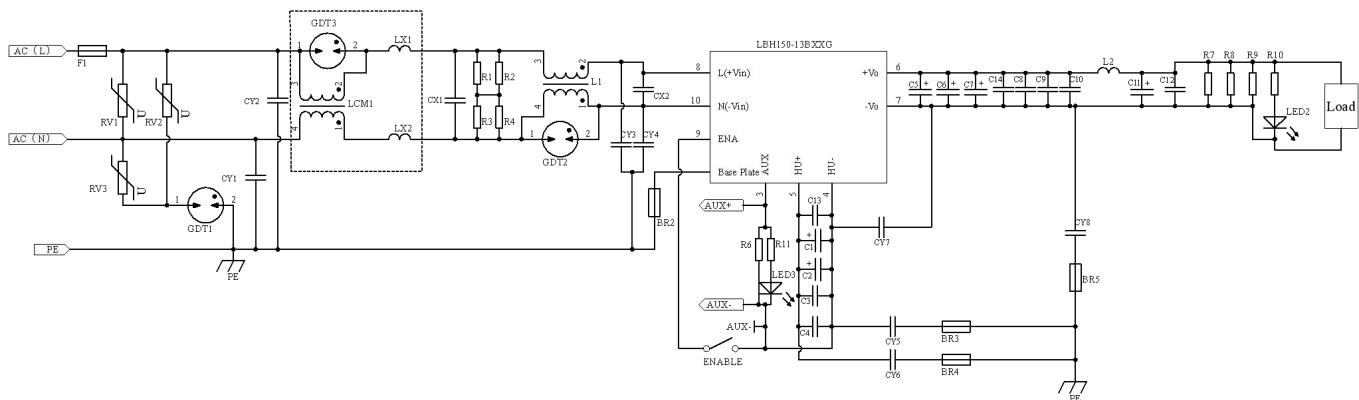


Fig. 2: Recommended circuit 2

Component	Recommended value
GDT3	300V/1KA
LX1/LX2	2mH/Min: 2A (recommend MORNSUN P/N: FD2D-20-202)
LCM1	5.6mH/Min: 2A (recommend MORNSUN P/N: FL2D-20-562)
CY1/CY2	Y1/102M/400VAC

Note: The external circuit component parameters are the same as those of the above recommended circuit 1.

Dimensions and Recommended Layout

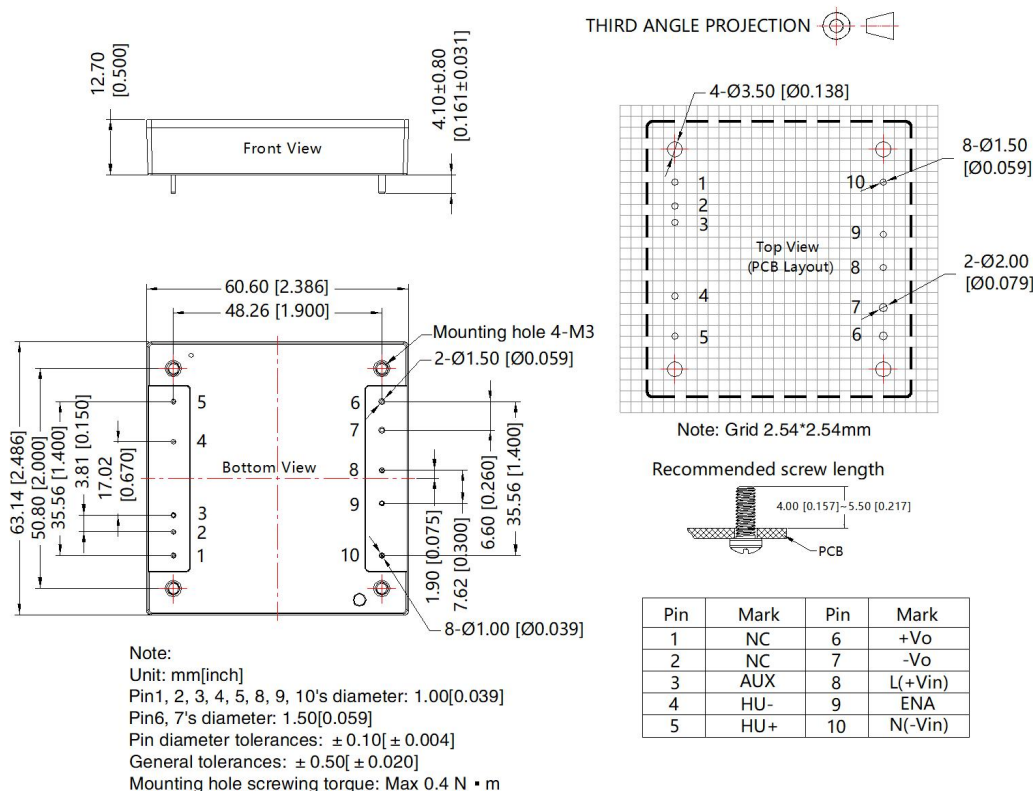

Pin description					
1	NC	Open	6	+Vo	Positive DC output
2	NC	Open	7	-Vo	Negative DC output
3	AUX	Output of auxiliary source, reference HU-	8	L(+Vin)	AC input Line/Positive DC input
4	HU-	Keep the capacitor voltage negative	9	ENA	Switch enable pin
5	HU+	Keep the capacitor voltage positive	10	N(-Vin)	AC input Neutral/Negative DC input

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200069;
- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
- All EMC tests require the test module to be mounted on a metal plate with a thickness of 3mm x 450mm x 450mm.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com

LBH150-13Bxx Series Power Supply Application Manual

Content

1. Appearance Pin Definition.....	8
1.1. Appearance pin definition.....	8
2. Instructions For Use.....	8
2.1. Input requirements.....	8
2.2. Output requirements.....	8
2.3. ENA Remote control switch.....	9
2.4. Auxiliary power supply for external signals (AUX terminal).....	9
2.5. Input under-voltage protection (UVP)	9
2.6. Output over-voltage protection (OVP)	9
2.7. Over-current/short circuit protection.....	9
2.8. Over-temperature protection.....	10
2.9. Output power derating.....	10
2.10. Peripheral layout recommendation.....	11
3. Test Waveform.....	13
3.1. Switch ON/OFF.....	13
3.2. Dynamic response.....	14
3.3. Output ripple & noise.....	14
3.4. Conducted & radiated emission (EMI).....	15
4. Appearance Specifications.....	17
4.1. Manufacturing data/dimensions.....	17
4.2. Installation and disassembly methods.....	17
4.3. Cooling method.....	18

1. Appearance Pin Definition

1.1. Appearance pin definition



Figure 1: Appearance pins

1	NC	Open	6	+Vo	Positive DC output
2	NC	Open	7	-Vo	Negative DC output
3	AUX	Output of auxiliary source, reference HU-	8	L(+Vin)	AC input Line/Positive DC input
4	HU-	Keep the capacitor voltage negative	9	ENA	Switch enable pin
5	HU+	Keep the capacitor voltage positive	10	N(-Vin)	AC input Neutral/Negative DC input

2. Instructions For Use

2.1. Input requirements

The AC input voltage and DC input voltage must be within the defined voltage range (refer to datasheet), otherwise the power supply may not work properly or even malfunction. The power module does not have a built-in fuse. For better protection, it is recommended that customers use a circuit breaker not greater than 3.15A.


To ensure the reliability of the product, hot plugging is prohibited.

2.2. Output requirements

At any output voltage value, if the long-term normal operation, the maximum output current and power must not exceed the rated value, and ensure that the aluminum substrate temperature does not exceed the temperature derating curve requirements.


2. 3. ENA Remote control switch

The module has built-in ENA remote control switch function. This function can control ON/OFF of the output voltage when the input voltage is turned on. Short circuit ENA and HU-, and the output voltage is normal; ENA disconnect to HU-, and the output voltage turn off. The wiring diagram circuit is as follows:

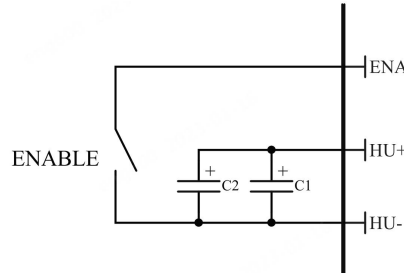

2. 4. Auxiliary power supply for external signals (AUX terminal)

The module additionally provides 12V auxiliary source output, the reference ground is HU- and provides an auxiliary control power supply for the primary side control circuit. No load voltage 8-15V (Internal resistor in series 1 k Ω , maximum pulling current about 10mA).

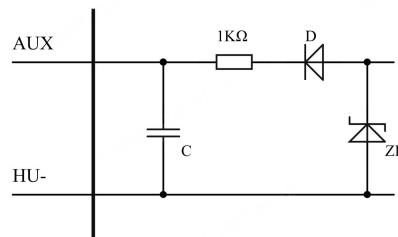

2. 5. Input under-voltage protection (UVP)

When the input voltage is lower than the under-voltage protection set value, the module output is closed; When the input voltage is higher than the under-voltage protection power-on setting value, the module output is normal. The under-voltage protection has a return difference, that is, the shutdown setting value is lower than the start-up setting value, so as to prevent the module from being affected by external interference or the transient drop of input voltage when it is started.

2. 6. Output over-voltage protection (OVP)

This module has output hiccup type output over-voltage protection function. When the output end of the module is over-voltage, the output voltage hiccup. After the fault is rectified, the module output automatically recovers to normal.

2. 7. Over-current/short circuit protection

This module is designed with over-current/short circuit protection circuit, which can withstand over-current or short circuit at the output end. In short circuit state, the module is in hiccup state (working 58ms, rest 2.1s), as shown in Figure 2; After the over-current and short circuit faults are eliminated, the module output automatically recovers to normal.

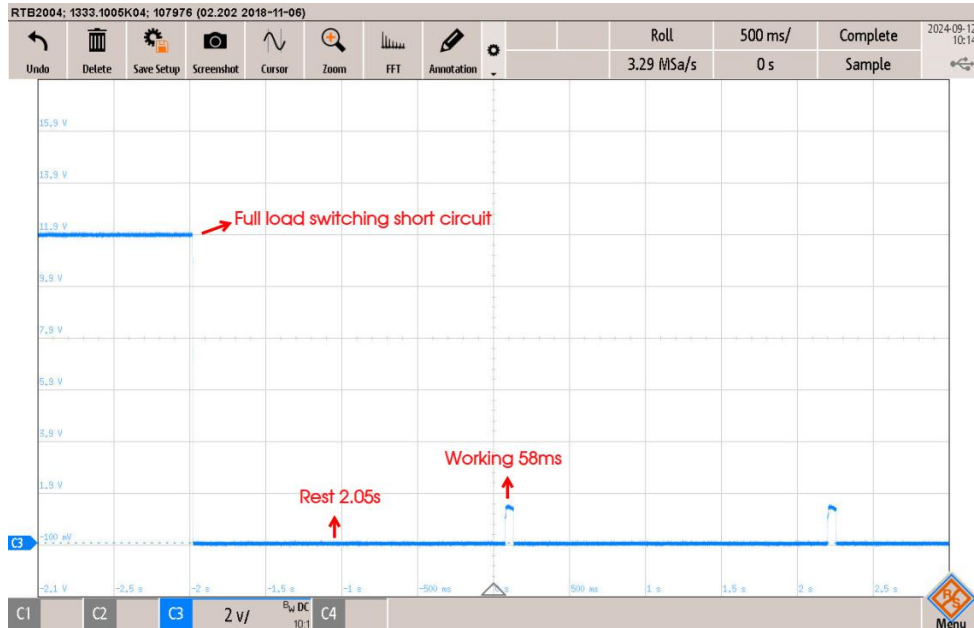


Figure 2: Output voltage waveform of full-load switching short-circuit

2. 8. Over-temperature protection




The module has built-in over-temperature protection circuit to prevent the module from being damaged due to excessive temperature rise such as overload and short circuit. When the temperature of the aluminum substrate exceeds the over-temperature protection setting value, the output of the module automatically shuts down. It needs to be powered off and reset to restore normal. Over-temperature protection circuit adopts thermistor sampling, instant overheating may not protect in time, resulting in product damage. Ensure good heat dissipation when using the product.

2. 9. Output power derating

When the input voltage is greater than 100VAC(140VDC), only need to derate according to the temperature derating curve.

When the input voltage is lower than 100VAC(140VDC), the output power will be derated according to the following input voltage derating curve after temperature derating;

The temperature derating curve is a typical test value, the working condition is heat sink with air cooling. For applications in closed environment please consult Mornsun FAE.

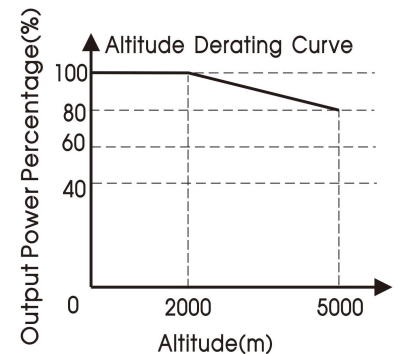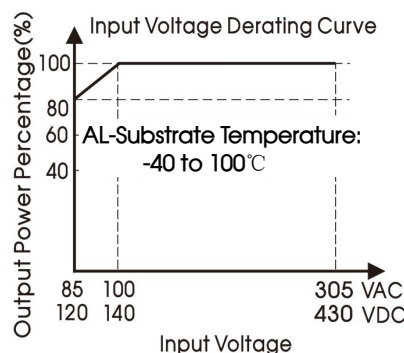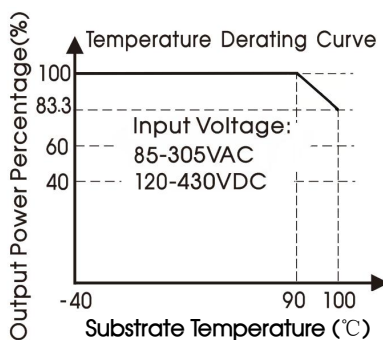

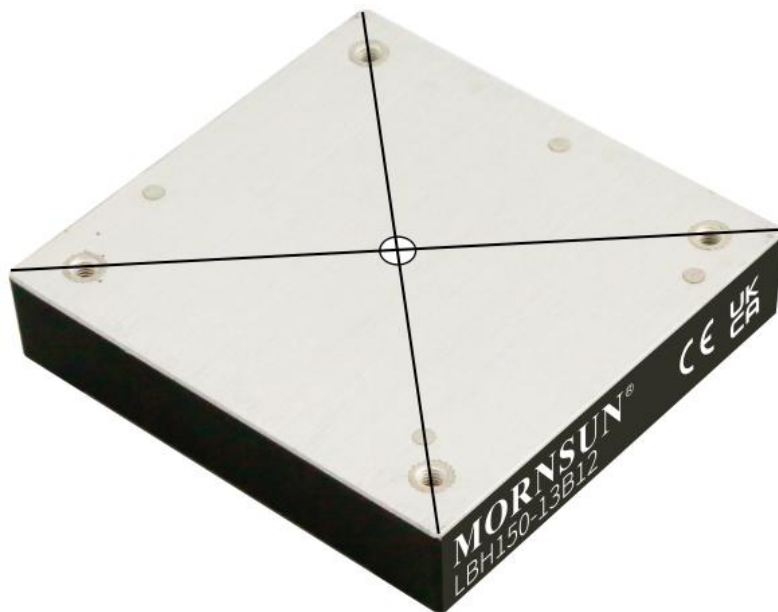


Figure 3: AL-Substrate temperature test point

Note: The test point of AL-Substrate temperature is the temperature of the center point of the substrate.

2. 10. Peripheral layout recommendation



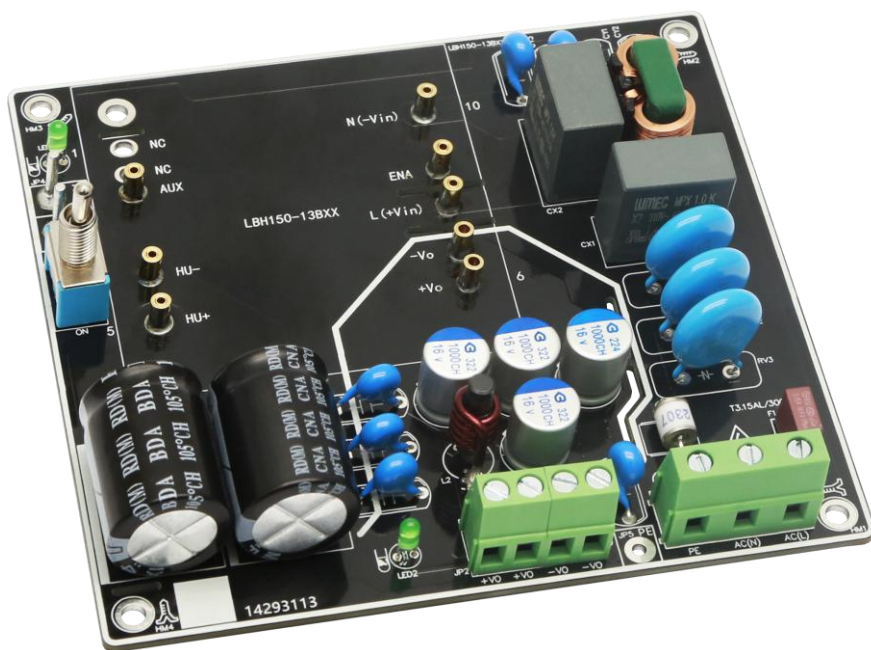


Figure 4: DEMO board physical drawing of recommended circuit 1

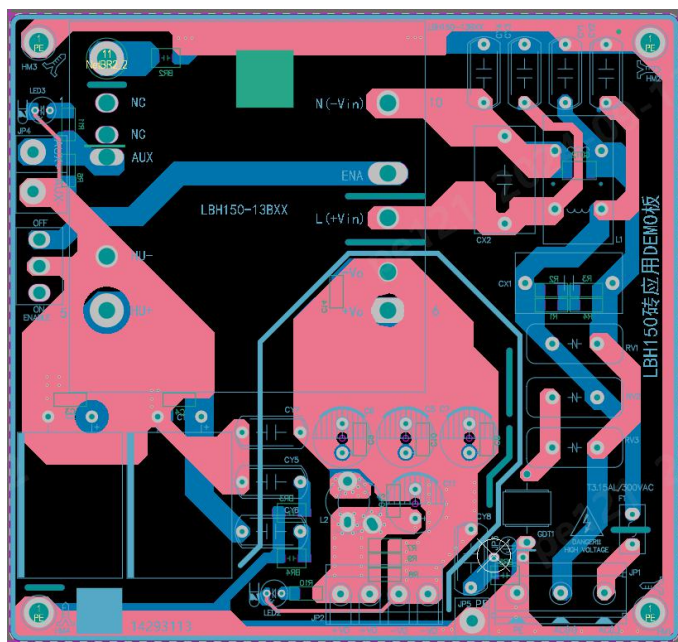



TOP layer

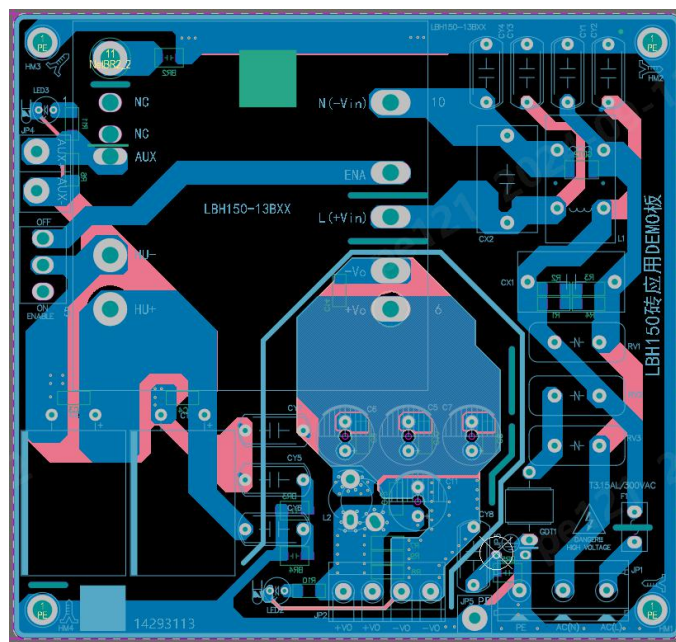


TOP layer

Figure 5: PCB routing diagram of recommended circuit 1

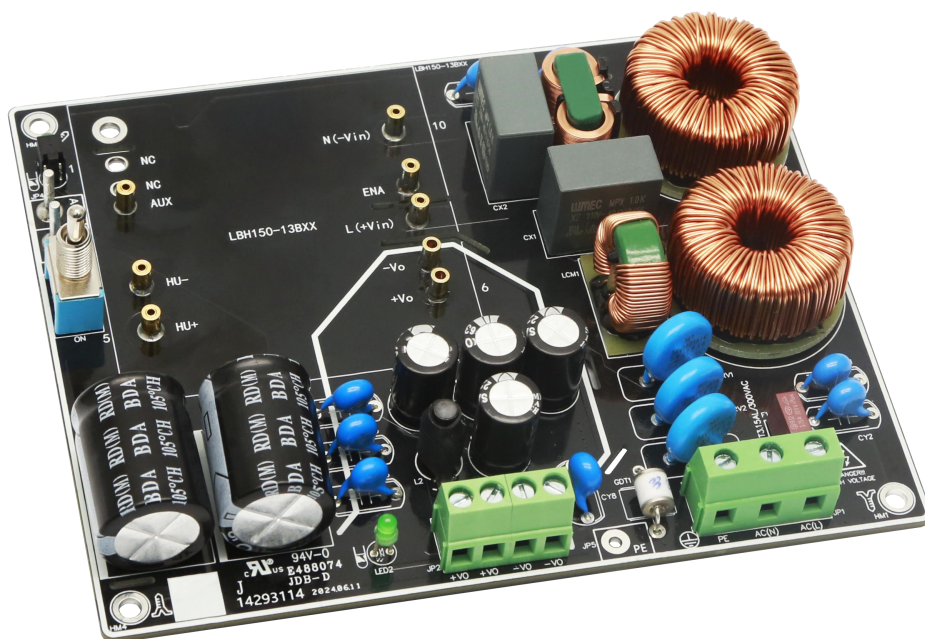

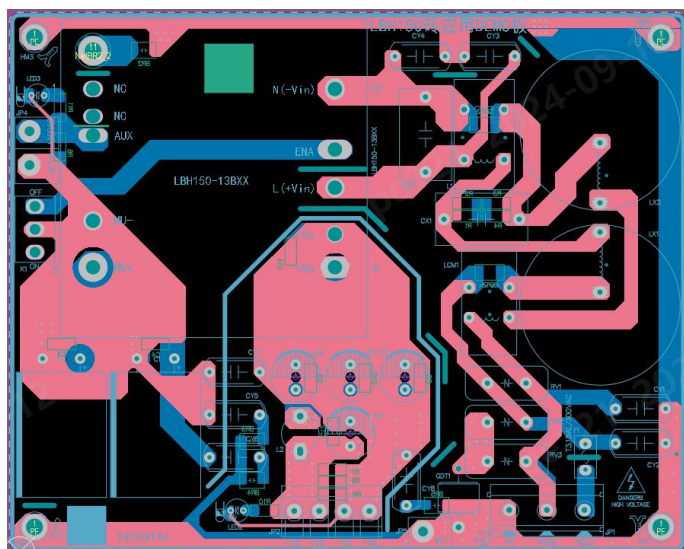

Top layer

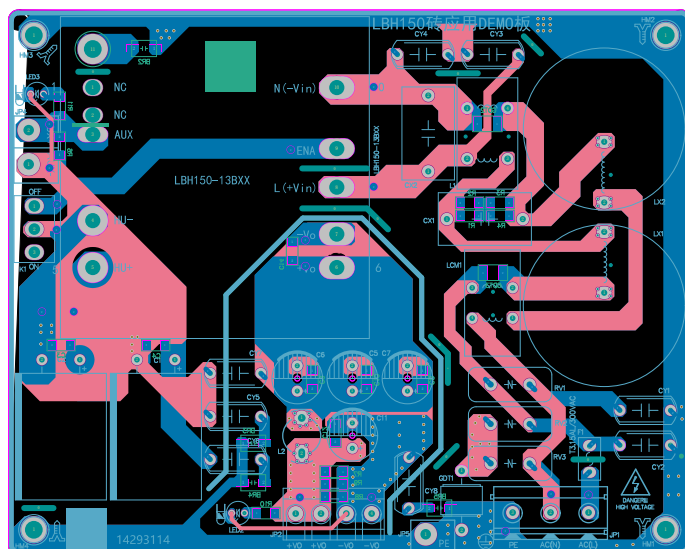





Top layer

Figure 7: PCB routing diagram of recommended circuit 2

3. Test Waveform

3.1. Switch ON/OFF

Test conditions: $T_c=25^{\circ}\text{C}$, LBH150-13B12 product is tested based on recommended circuit 1, $C1/C2=82\mu\text{F}$.

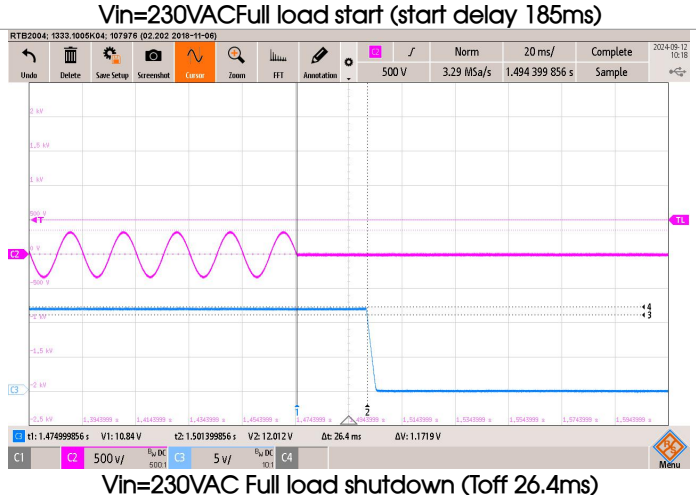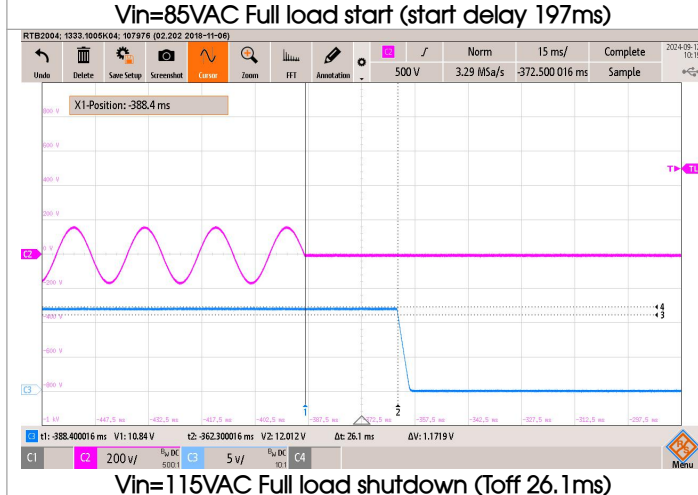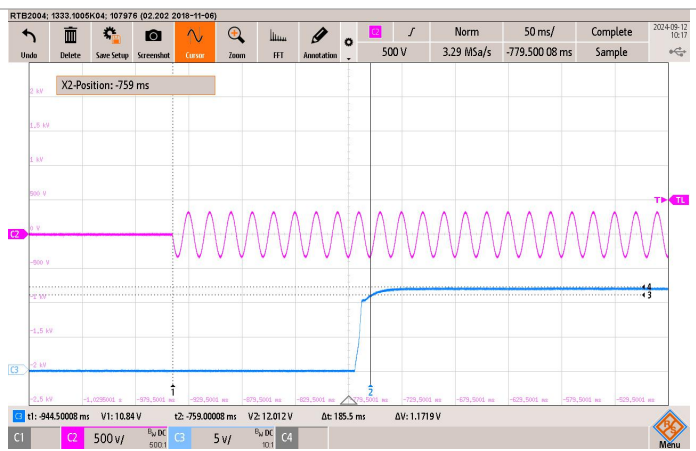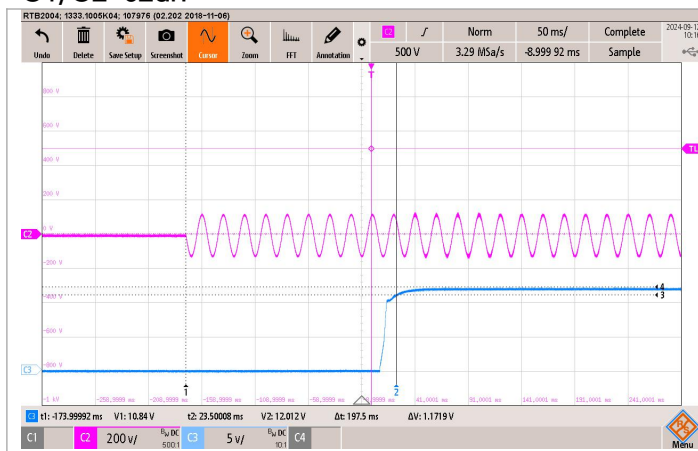



CH2: Input voltage, CH3: Output voltage

Note: The power OFF hold-up time is related to the C1, C2 capacitance, and can be adjusted with reference to the following formula:

$$t = \frac{0.5 \cdot C_{C1+C2} \cdot (U_1^2 - U_2^2)}{P_o}$$


3.2. Dynamic response

Test conditions: Tc=25°C, Vin= 230VAC, Vout=12V, 20MHz bandwidth. Products are tested based on recommended circuit 1 and the "parallel cable" method is used for test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor.

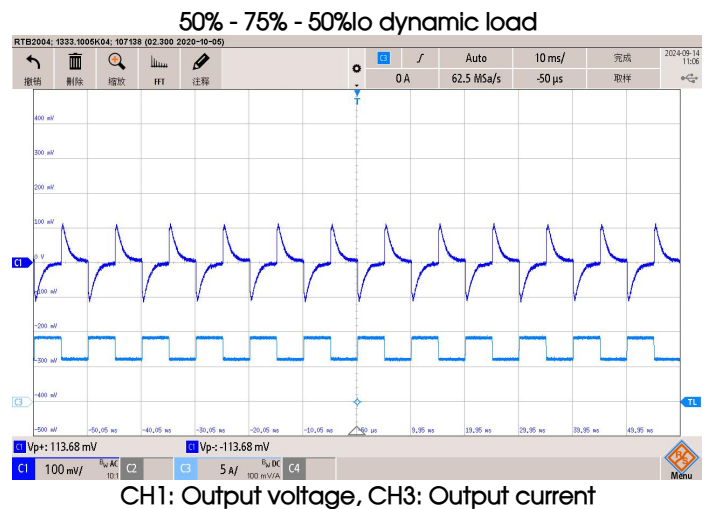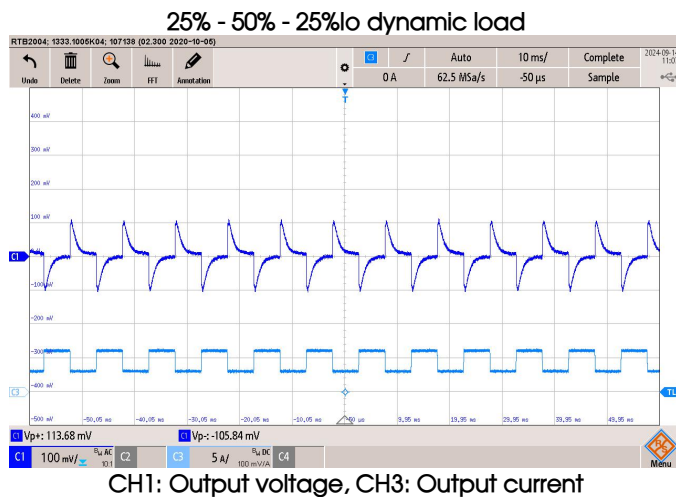

3.3. Output ripple & noise

Test conditions: Tc=25°C, Vin= 230VAC, Vout=12V, 20MHz bandwidth. Products are tested based on recommended circuit 1 and the "parallel cable" method is used for test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor.

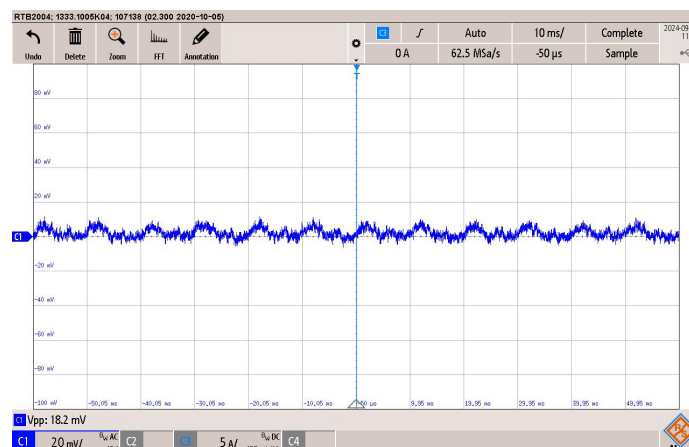


Waveform of full load output ripple
CH1: Output voltage

3. 4. Conducted & radiated emission (EMI)

(1) Radiated emission (RE):


Safety specifications: CISPR32/EN55032 CLASS A

RE Tc=25°C, Vin=115VAC, Pout= 150W, LBH150-13B12G is tested based on recommended circuit 1

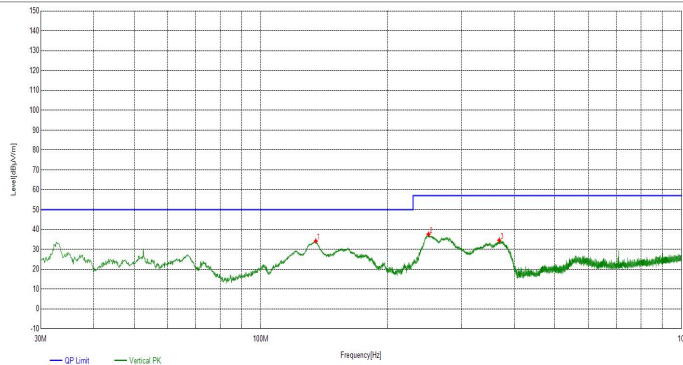

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
135.0615	Vertical	9.59	24.56	34.15	50.00	15.85	PK	100	96	PASS
250.212	Vertical	14.24	23.33	37.57	57.00	19.43	PK	100	214	PASS
368.5639	Vertical	17.14	17.43	34.57	57.00	22.43	PK	100	214	PASS


Vertical waveform

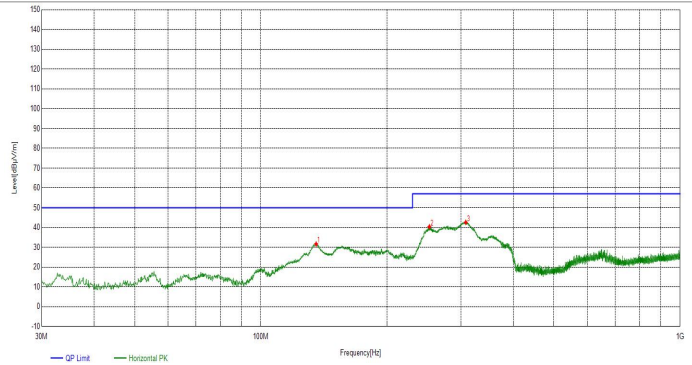

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
135.4495	Horizontal	9.58	22.10	31.68	50.00	18.32	PK	100	132	PASS
252.2492	Horizontal	14.30	26.07	40.37	57.00	16.63	PK	100	106	PASS
308.1268	Horizontal	15.70	26.89	42.59	57.00	14.41	PK	100	119	PASS


Horizontal waveform

RE Tc=25°C, Vin=230VAC, Pout= 150W, LBH150-13B12G is tested based on recommended circuit 1

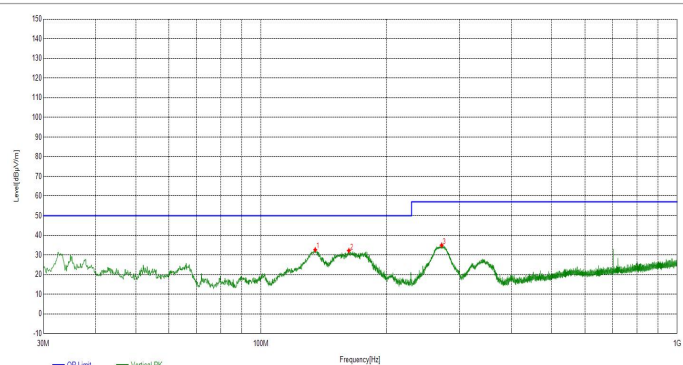

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
134.9645	Vertical	9.59	23.04	32.63	50.00	17.37	PK	100	134	PASS
162.6123	Vertical	10.24	21.99	32.23	50.00	17.77	PK	100	194	PASS
271.6512	Vertical	14.79	20.19	34.98	57.00	22.02	PK	100	156	PASS

Vertical waveform

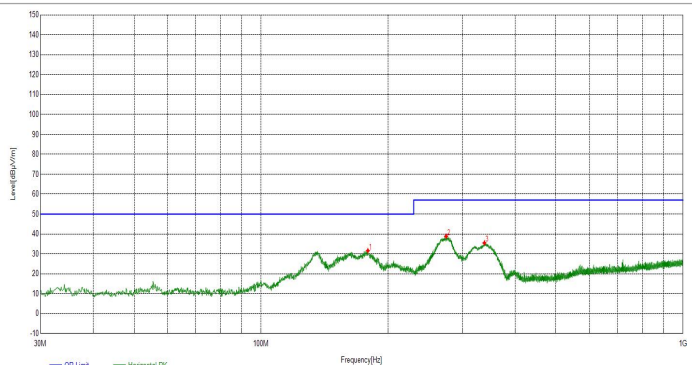

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
179.1039	Horizontal	11.72	19.87	31.59	50.00	18.41	PK	100	204	PASS
274.4644	Horizontal	14.86	23.97	38.83	57.00	18.17	PK	100	248	PASS
338.2968	Horizontal	16.43	19.06	35.49	57.00	21.51	PK	100	111	PASS


Horizontal waveform

The test results meet CLASS A standards

(2) Conducted emission (CE):


Safety specifications: CISPR32/EN55032 CLASS A

CE Tc=25°C, Vin=115VAC, Pout= 150W, LBH150-13B12 is tested based on recommended circuit 1

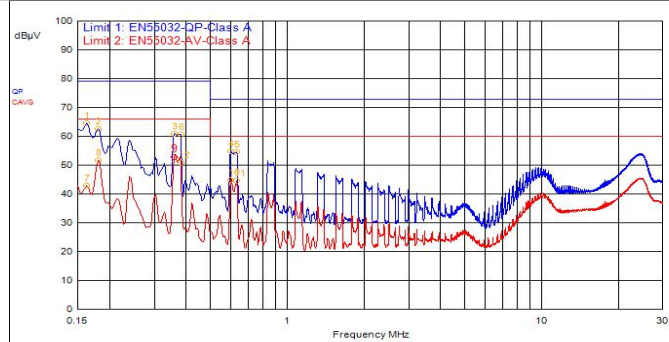

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit	Limit Dist.
9	360.000kHz	0.2	0.2	11.1	C_AVG	41.4	52.8	66.0	-13.2
1	162.000kHz	0.1	0.2	10.2	QPeak	54.1	64.7	79.0	-14.3
8	180.000kHz	0.2	0.2	10.6	C_AVG	40.6	51.6	66.0	-14.4
12	381.000kHz	0.2	0.2	10.9	C_AVG	39.6	50.9	66.0	-15.1
10	600.000kHz	0.2	0.2	10.0	C_AVG	34.4	44.8	60.0	-15.2


L line

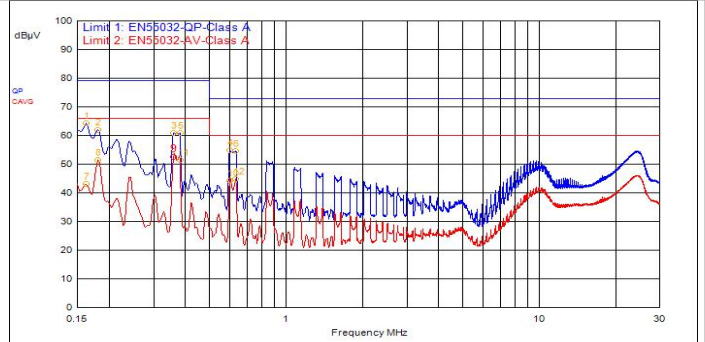

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit	Limit Dist.
9	360.000kHz	0.2	0.2	11.1	C_AVG	41.2	52.6	66.0	-13.4
8	180.000kHz	0.2	0.2	10.6	C_AVG	40.5	51.4	66.0	-14.6
11	381.000kHz	0.2	0.2	10.9	C_AVG	40.0	51.3	66.0	-14.7
1	162.000kHz	0.1	0.2	10.2	QPeak	53.7	64.2	79.0	-14.8
12	633.000kHz	0.2	0.2	10.0	C_AVG	34.4	44.8	60.0	-15.2


N line

CE Tc=25°C, Vin=230VAC, Pout= 150W, LBH150-13B12 is tested based on recommended circuit 1

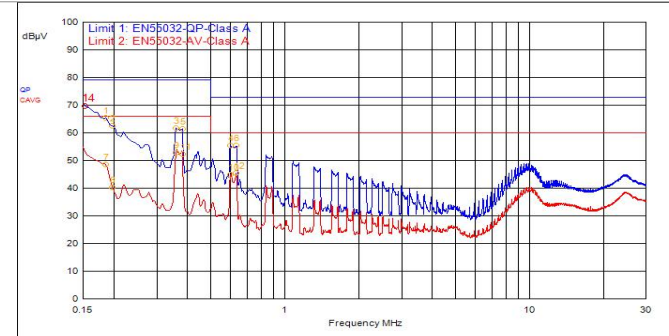

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit	Limit Dist.
13	150.000kHz	0.1	0.2	10.0	QPeak	60.6	70.9	79.0	-8.1
14	153.000kHz	0.1	0.2	10.1	QPeak	59.5	69.8	79.0	-9.2
9	360.000kHz	0.2	0.2	11.1	C_AVG	41.3	52.8	66.0	-13.2
1	186.000kHz	0.2	0.2	10.7	QPeak	54.2	65.3	79.0	-13.7
11	381.000kHz	0.2	0.2	10.9	C_AVG	41.0	52.3	66.0	-13.7

L line

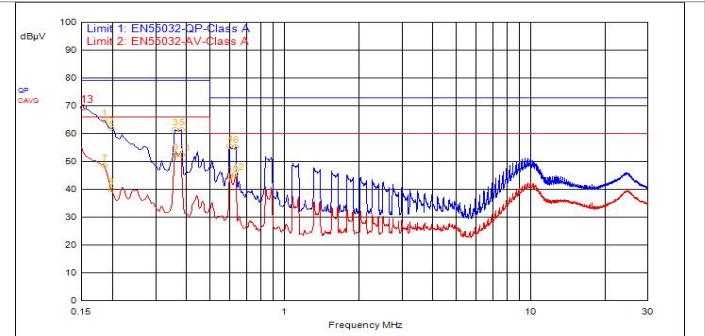



ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit	Limit Dist.
13	153.000kHz	0.1	0.2	10.1	QPeak	59.0	69.4	79.0	-9.6
9	360.000kHz	0.2	0.2	11.1	C_AVG	41.2	52.6	66.0	-13.4
11	381.000kHz	0.2	0.2	10.9	C_AVG	40.9	52.2	66.0	-13.8
1	186.000kHz	0.2	0.2	10.7	QPeak	53.8	64.8	79.0	-14.2
12	633.000kHz	0.2	0.2	10.0	C_AVG	34.9	45.4	60.0	-14.6

N line

At 115/230VAC input and full load, the test results meet the EN55032 CLASS A standards

Safety specifications: CE102 GJB151B

CE Tc=25°C, Vin=230VAC, Pout= 150W, LBH150-13B12 is tested based on recommended circuit 2

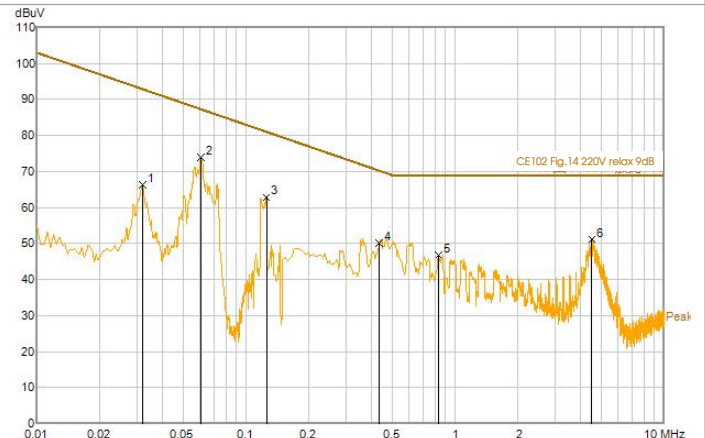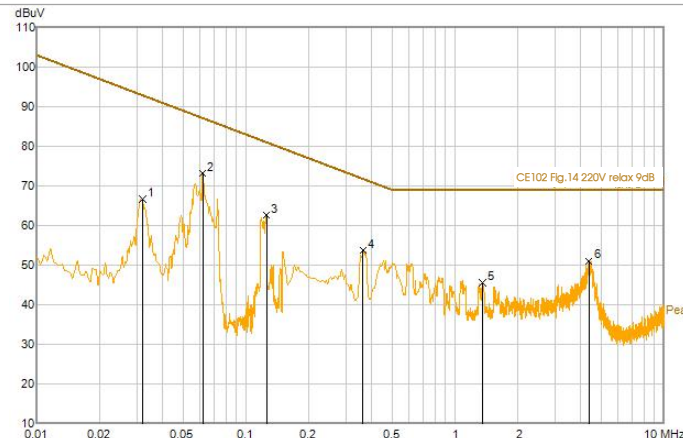

SN	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Note
1	0.032	46.2	20.59	66.79	92.89	26.1	Peak value
2	0.062	53.12	20.07	73.19	87.14	13.95	Peak value
3	0.1252	42.69	19.91	62.6	81.03	18.43	Peak value
4	0.362	33.84	19.89	53.73	71.81	18.08	Peak value
5	1.35	25.76	19.82	45.58	69	23.42	Peak value
6	4.382	31.11	19.89	51	69	18	Peak value

L line

SN	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Note
1	0.032	45.7	20.59	66.29	92.89	26.6	Peak value
2	0.0608	53.88	20.1	73.98	87.31	13.33	Peak value
3	0.1252	43.05	19.88	62.93	81.03	18.1	Peak value
4	0.434	30.24	19.86	50.1	70.23	20.13	Peak value
5	0.834	27.11	19.79	46.9	69	22.1	Peak value
6	4.51	31.27	19.86	51.13	69	17.087	Peak value

N line

The test results meet the CE102 GJB151B standard

4. Appearance Specifications

4.1. Manufacturing data/dimensions

Length: 63.14mm ± 2.486 mm
Width: 60.60mm ± 2.386 mm
Height: 12.70mm ± 0.50 mm
Terminal length: 4.10mm ± 0.80 mm
Weight: 140g (Typ.)

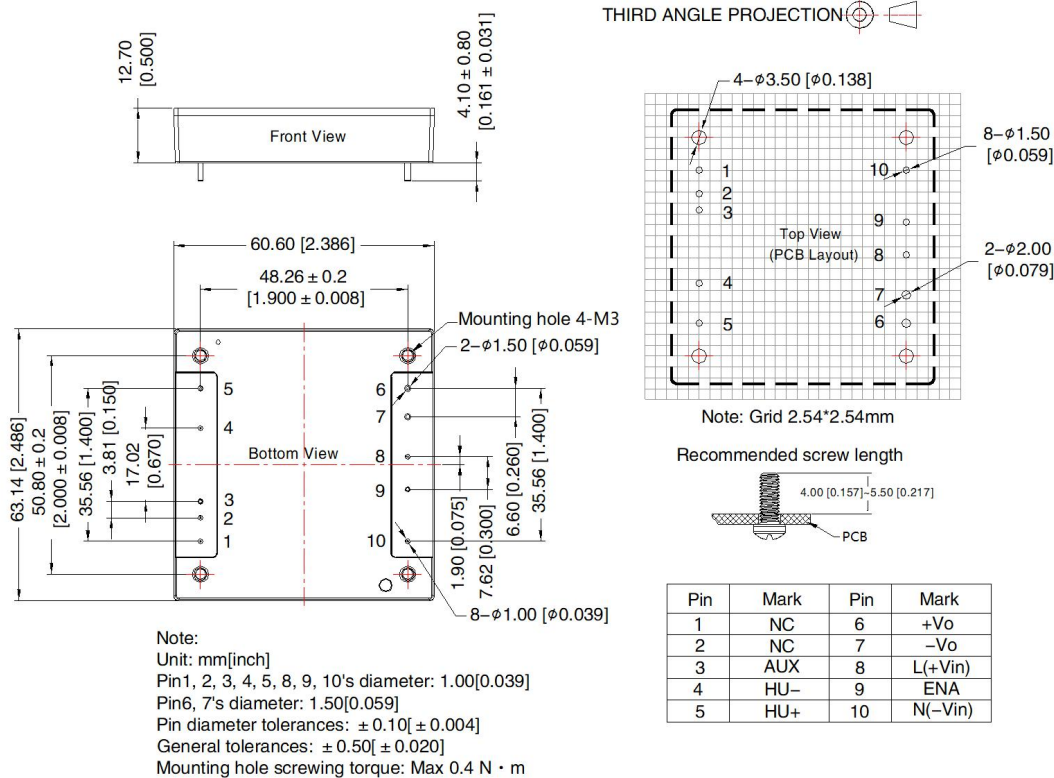


Figure 8: Manufacturing data/size diagram

4.2. Installation and disassembly methods

Installation method: Place the heat sink on the aluminum base plate and fasten the heat sink to the product using four screws.

Removing method: Use a tool to separate the four screws from the heat sink.

Maximum mounting hole tightening torque: 0.4N.m.

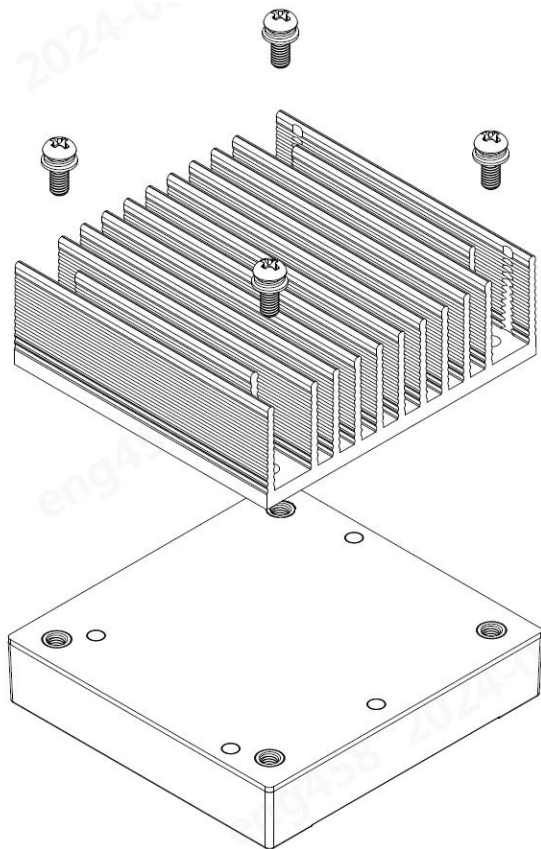


Figure 9: Product and heat sink installation and disassembly diagram

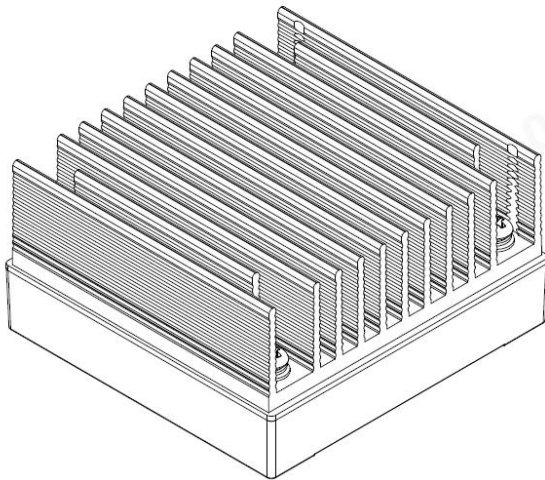


Figure 10: Schematic diagram of the finished product after installation

4. 3. Cooling method

Heat dissipation method	Surface heat sink	☐
	Natural cooling	☐
	Conduction heat dissipation	☒
	In this document, "■" indicates selected, and "□" indicates not selected	

For more details, please consult the MORNSUN FAE.