

60W, AC-DC converter



CE Report
EN62368-1

UK
BS EN 62368-1

RoHS



FEATURES

- Universal 85-305VAC or 100-430VDC input voltage
- Operating ambient temperature range: -40℃ to +70℃
- High I/O isolation test voltage up to 4000VAC
- High efficiency, high reliability
- Output short circuit, over-current, over-voltage protection
- Regulated output, low ripple & noise
- Plastic case meets UL94V-0 flammability
- Meets EMI CLASS B and surge level 4

LHE60-23Bxx series AC-DC converters are highly efficient, environmental-friendly 60W power modules. It features universal AC input and at the same time accepts DC input voltage, low power consumption, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368 standards. The converters are widely used in industrial, power, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.*	Output Power	Nominal Output Voltage and Current(Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
EN	LHE60-23B05	60W	5V/10000mA	82	50000
	LHE60-23B12		12V/5000mA	86	10000
	LHE60-23B15		15V/4000mA	86	8000
	LHE60-23B24		24V/2500mA	86	2700
	LHE60-23B48		48V/1250mA	86	680

Note:

1. * Use suffix "A5" for chassis and suffix "A6" for DIN-Rail mounting.

2. The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	85	--	305	VAC
	DC Input	100	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	1.4	A
	230VAC	--	--	0.8	
Inrush Current	115VAC	--	45	--	
	230VAC	--	90	--	
Leakage Current	277VAC/50Hz	0.25mA RMS Max.			
Built-in Fuse		3.15A/300V, slow-blow			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	--	±2	--	%
Line Regulation	Rated load	--	±0.5	--	
Load Regulation	0%-100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	--	150	mV
Stand-by Power Consumption	5/12/15/24V output	--	--	0.5	W
	48V output	--	--	0.65	
Temperature Coefficient		--	±0.02	--	%/℃
Short Circuit Protection		Hiccup, continuous, self-recovery			

Over-current Protection		$\geq 110\%I_o$, self-recovery			
Over-voltage Protection	5VDC Output	$\leq 9VDC$ (Output voltage clamp or turn off)			
	12VDC Output	$\leq 16VDC$ (Output voltage clamp or turn off)			
	15VDC Output	$\leq 24VDC$ (Output voltage clamp or turn off)			
	24VDC Output	$\leq 35VDC$ (Output voltage clamp or turn off)			
	48VDC Output	$\leq 60VDC$ (Output voltage clamp or turn off)			
Minimum Load		0	--	--	%
Hold-up Time	115VAC input	--	8	--	ms
	230VAC input	--	65	--	

Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-PE	Electric Strength Test for 1min., leakage current <5mA	2000	--	--	VAC
	Input-Output		4000	--	--	
	Output-PE		500	--	--	
Operating Temperature			-40	--	+70	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Soldering Temperature	Wave-soldering, Max. 10 seconds		255	260	265	°C
	Manual-welding, Max. 5 seconds		350	360	370	
Switching Frequency			--	65	--	kHz
Power Derating	-40°C to -30°C		4.0	--	--	% / °C
	+45°C to +70°C (5V output)		3.0	--	--	
	+50°C to +70°C (12V, 15V output)		2.5	--	--	
	+55°C to +70°C (24V, 48V output)		2.5	--	--	
	85VAC - 110VAC		1.0	--	--	% / VAC
	277VAC - 305VAC		0.72	--	--	
Safety Standard		EN/BS EN62368-1(Report) safety approved; Design refer to IEC/UL62368-1				
Safety Class		CLASS I				
MTBF		MIL-HDBK-217F@25°C > 300,000 h				

Mechanical Specifications



Case Material	Black plastic, flame-retardant and heat-resistant (UL94V-0)	
Dimension	Horizontal package	109.00 x 58.50 x 30.00 mm
	A5 chassis mounting	135.00 x 70.00 x 38.50 mm
	A6 Din-Rail mounting	137.00 x 70.00 x 44.00 mm
Weight	Horizontal package	300g (Typ.)
	A5 chassis mounting	390g (Typ.)
	A6 Din-Rail mounting	460g (Typ.)
Cooling method	Free air convection	

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032 CLASS B			
	RE	CISPR32/EN55032 CLASS B			
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6KV$ /Air $\pm 8KV$	perf. Criteria B	
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A	
	EFT	IEC/EN61000-4-4	$\pm 4KV$	perf. Criteria B	
	Surge	IEC/EN61000-4-5	line to line $\pm 2KV$ /line to PE $\pm 4KV$	perf. Criteria B	

		IEC/EN61000-4-5	line to line $\pm 4\text{KV}$ /line to PE $\pm 6\text{KV}$ (See Fig.2 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

Product Characteristic Curve

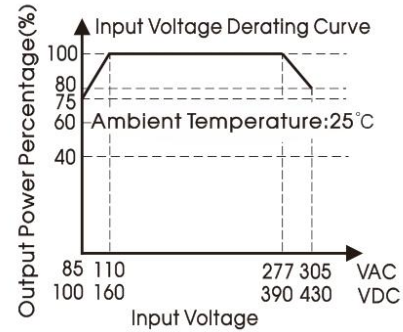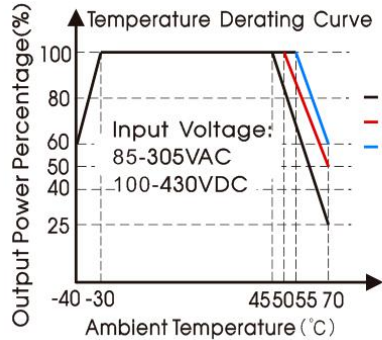

Note: ① With an AC input between 85-110V/277-305VAC and a DC input between 100-160V/390-430VDC, the output power must be derated as per temperature derating curves;
② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

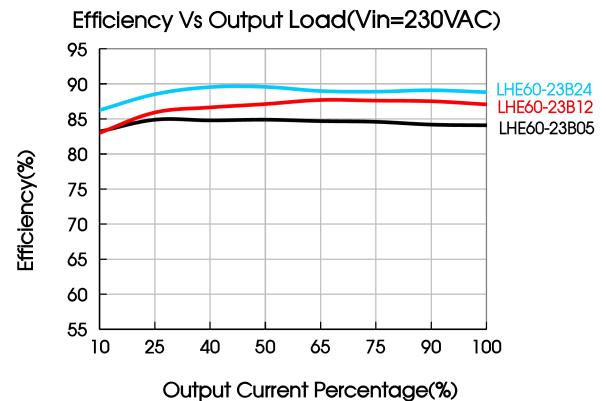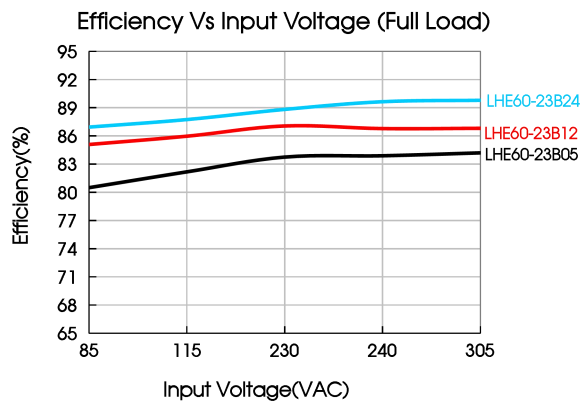

Design Reference

1. Typical application

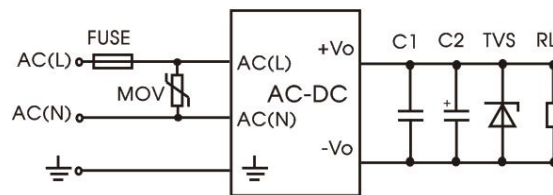


Fig. 1: Typical circuit diagram

Part No.	C1(μF)	C2(μF)	FUSE	MOV	TVS
LHE60-23B05	1	680	3.15A/300V, slow-blow	S14K350	SMBJ7.0A
LHE60-23B12		330			SMBJ20A
LHE60-23B15		330			SMBJ20A
LHE60-23B24		200			SMBJ30A
LHE60-23B48		100			SMBJ64A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit


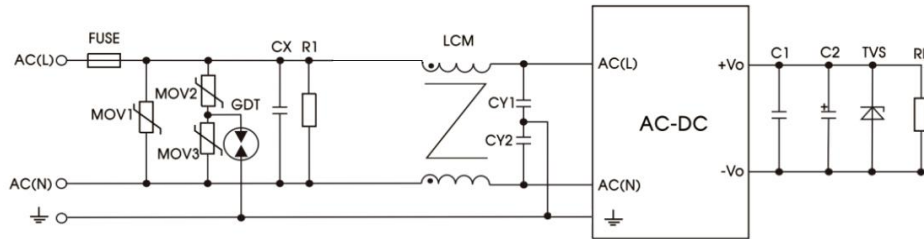


Fig. 2: EMC application circuit with higher requirements

Component	Recommended value
MOV1	S20K350
MOV2/MOV3	S10K350
CX	0.15μF/300VAC
CY1/CY2	2.2nF/400VAC
R1	1MΩ/2W
LCM	2.2mH, P/N: FL2D-30-222 (MORNSUN) is recommended
GDT	B5G3600
FUSE	3.15A/300V slow-blow required

3. Trim Function for Output Voltage Adjustment (open if unused)

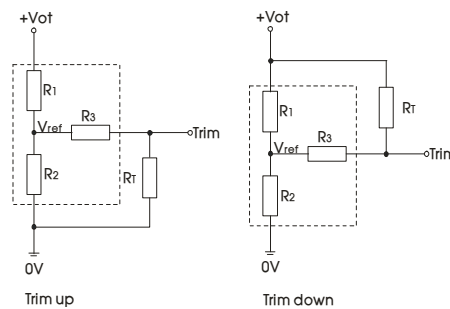

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\begin{aligned}
 \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{ref}}{V_{ot} - V_{ref}} \cdot R_1 \\
 \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_{ot} - V_{ref}}{V_{ref}} \cdot R_2
 \end{aligned}$$



R_T = Trim Resistor value;
 α = self-defined parameter;
 V_{ot} = desired output voltage ($\pm 10\%$ max.).

Vout nominal	R1 (kΩ)	R2 (kΩ)	R3 (kΩ)	Vref (V)	Vot (V)
5V	3.3	3.3	1	2.5	Resulting Trimmed Output voltage; range $\leq \pm 10\%$
12V	3.83	1	1	2.5	
15V	7.5	1.5	1	2.5	
24V	8.66	1	1	2.5	
48V	33	1.8	1	2.5	

4. For additional information please refer to application notes on www.mornsun-power.com.

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

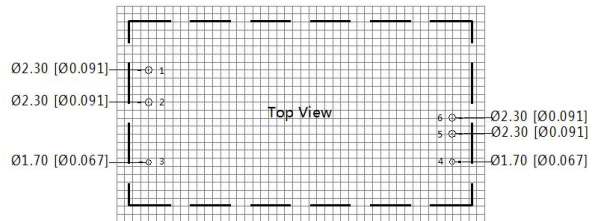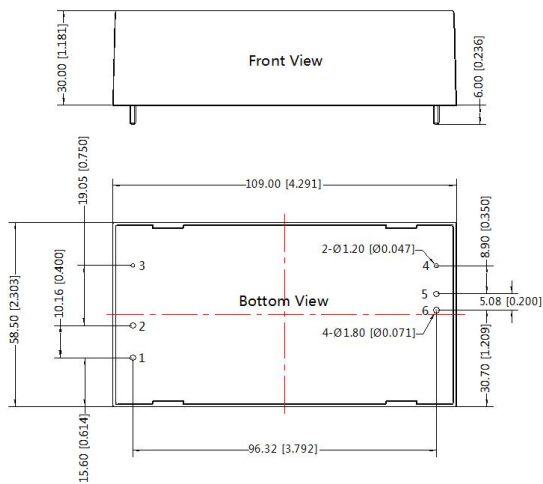


Note : Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	⏏
4	Trim
5	-Vo
6	+Vo

Note:
Unit: mm[inch]
Pin1,2,5,6's diameter: 1.80[0.071], pin 3,4's diameter: 1.20[0.047]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
Pin tolerances(H): $\pm 1.50[\pm 0.059]$
General tolerances: $\pm 0.50[\pm 0.020]$

A5 Dimensions


THIRD ANGLE PROJECTION

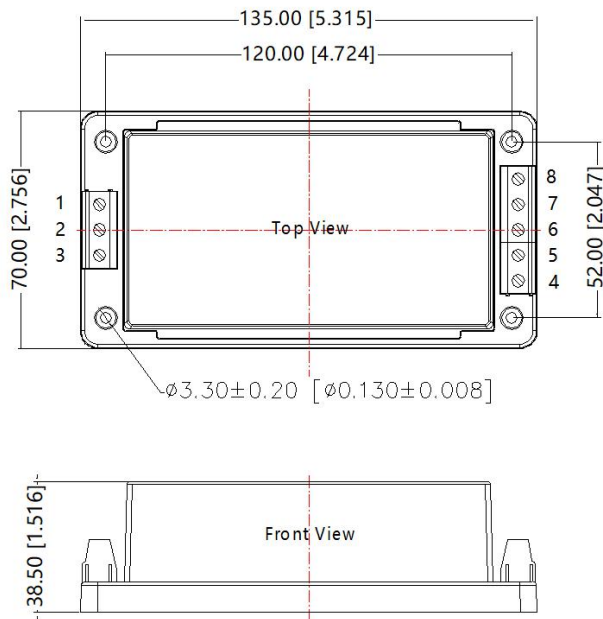


Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	⏏
4	Trim
5	-Vo
6	+Vo
7	NC
8	NC

Note:
Unit: mm[inch]
Wire range: 24~12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: $\pm 1.00[\pm 0.040]$

A6 Dimensions

THIRD ANGLE PROJECTION 

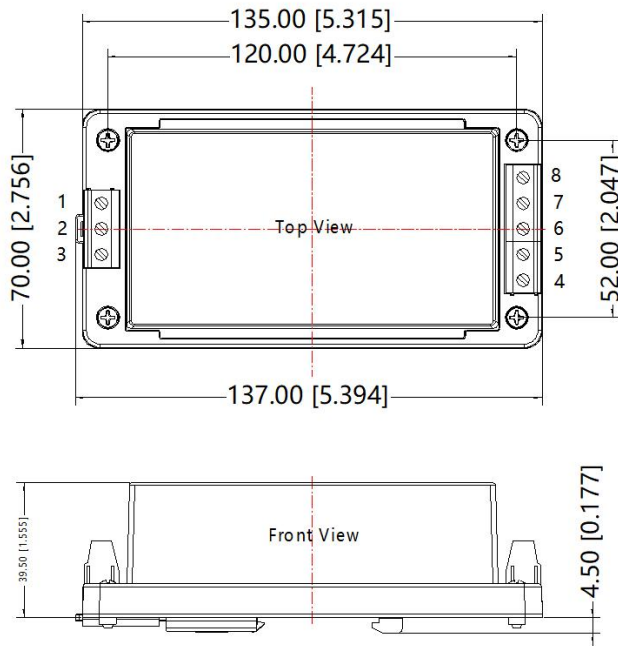

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	
4	Trim
5	-Vo
6	+Vo
7	NC
8	NC

Note:

Unit: mm[inch]

Wire range: 24~12 AWG

Tightening torque: Max 0.4 N·m

Mounting rail: TS35, rail needs to connect safety ground

General tolerances: $\pm 1.00[\pm 0.040]$

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220020 (Horizontal package); 58220031 (A5/A6 package);
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No.8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com