



## FEATURES

- Universal 85 - 277VAC or 120 - 390VDC Input voltage
- Efficiency up to 95.5%
- Operating ambient temperature range: -40℃ to +85℃
- 150% peak load
- Active PFC, PF>0.99
- DC OK function
- Double-sided conformal coating, salt-spray proof, explosion-proof
- Operating altitude up to 5000m
- OVC III (design refer to EN62477, 2000m)
- 5 years warranty
- Output short circuit, over-current, over-voltage, over-temperature protection
- Design refer to ATEX, IECEx increased safety type explosion-proof certification
- Meets ANSI/ISA 71.04-2013 G3 corrosion test
- Design refer to IEC/UL62368, UL508

LIMF240-23Bxx is Mornsun explosion-proof Din-rail power supply featuring with energy saving, high performance, high reliability, high efficiency. With 150% peak load capacity is enough to support heavy loads such as DC motors or capacitive loads, up to 95.5% efficiency can greatly improve power supply reliability and service life. With good EMC performance and compliant with international standards of IEC/EN/UL/BS EN 62368, UL61010, UL508, ANSI/ISA 71.04-2013 for EMC and safety. The power supply meets the "ec" increased safety and "nC" isolation short-circuit n-type explosion-proof certification and is suitable for explosive environment where the equipment protection level is Gc in zone 2. They are widely used in wind power industry, DCS, industrial control equipment, machine control, LED, street light control, electric power, security, 5G communication and other fields.

## Selection Guide

| Certification | Part No.*     | Output Power (W) | Nominal Output Voltage and Current (Vo/Io) | Output Voltage Adjustable Range (V) | Efficiency at 230VAC (%) Typ. | Max. Capacitive Load (μF) |
|---------------|---------------|------------------|--------------------------------------------|-------------------------------------|-------------------------------|---------------------------|
| EN            | LIMF240-23B12 | 192              | 12V/16A                                    | 12.0-14.0                           | 94                            | 100000                    |
|               | LIMF240-23B24 | 240              | 24V/10A                                    | 24.0-28.0                           | 95.5                          | 50000                     |
|               | LIMF240-23B48 |                  | 48V/5A                                     | 48.0-53.0                           |                               | 25000                     |

Note: 1. \*When the output voltage rises, the total power of the product should not exceed the rated power;

2. \*Please refer to the derating curve, when the 48V output voltage is adjusted to 53V - 56V;

3. \*This product is suitable for indoor use, if it is used in outdoor environment, please consult our FAE.

## Input Specifications

| Item                    | Operating Conditions            |        | Min. | Typ. | Max. | Unit |
|-------------------------|---------------------------------|--------|------|------|------|------|
| Input Voltage Range     | Rated input (Certified voltage) |        | 100  | --   | 240  | VAC  |
|                         | AC input                        |        | 85   | --   | 277  |      |
|                         | DC input                        |        | 120  | --   | 390  | VDC  |
| Maximum Input Voltage   | Lasts for 2h without damage     |        | --   | --   | 305  | VAC  |
| Input Voltage Frequency |                                 |        | 47   | --   | 63   | Hz   |
| Input Switching Voltage |                                 |        | --   | 80   | --   | VAC  |
| Input Turn-off Voltage  |                                 |        | --   | 60   | --   |      |
| Input Current           | 115VAC                          |        | --   | --   | 3    | A    |
|                         | 230VAC                          |        | --   | --   | 1.5  |      |
| Inrush Current          | Cold start                      | 115VAC | --   | 14   | --   |      |
|                         |                                 | 230VAC | --   | 26   | --   |      |

# AC/DC 240W Din-Rail Power Supply

## LIMF240-23Bxx Series

**MORNSUN®**

|                               |                           |        |                    |               |       |      |     |
|-------------------------------|---------------------------|--------|--------------------|---------------|-------|------|-----|
| Inrush Current Integral (I²t) | 115VAC                    |        |                    | --            | 0.25  | --   | A²s |
|                               | 230VAC                    |        |                    | --            | 0.867 | --   |     |
| Power Factor                  | Rated load                | 115VAC |                    | --            | 0.99  | --   | --  |
|                               |                           | 230VAC | 24V/48V            | --            |       | --   |     |
|                               |                           |        |                    | 12V           | --    | 0.98 | --  |
|                               |                           | THD    | 230VAC, rated load |               |       | --   | 3   |
| Start-up Delay Time           | 115VAC/230VAC, rated load |        |                    | --            | 520   | --   | ms  |
| Rise Time                     |                           |        |                    | --            | 19    | --   |     |
| Input Fuse                    | Built-in fuse             |        |                    | --            | 8     | --   | A   |
| DC OK Signal                  | Resistive load            |        |                    | 30VDC/1A Max. |       |      |     |
| Hot Plug                      |                           |        |                    | Unavailable   |       |      |     |

### Output Specifications

| Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Operating Conditions                    |                                     | Min.                                                                                      | Typ.  | Max. | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------|-------|------|------|
| Output Voltage Accuracy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Full load range                         |                                     | --                                                                                        | ±1.0  | --   | %    |
| Line Regulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Rated load                              |                                     | --                                                                                        | ±0.25 | --   |      |
| Load Regulation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0% - 100% load                          |                                     | --                                                                                        | ±0.5  | --   |      |
| Power Consumption*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 230VAC, rated load                      | 12V                                 | --                                                                                        | 11.5  | --   | W    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                         | 24V/48V                             | --                                                                                        | 10.8  | --   |      |
| Ripple & Noise*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 20MHz bandwidth<br>(peak-to-peak value) | 12V/48V                             | --                                                                                        | --    | 150  | mV   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                         | 24V                                 | --                                                                                        | --    | 100  |      |
| Hold-up Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                         |                                     | --                                                                                        | 37    | --   | ms   |
| Over-current Protection*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 115VAC/230VAC                           |                                     | 110                                                                                       | 150   | --   | %    |
| Short Circuit Protection*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                         |                                     | Hiccup mode, constant current works 1s (Typ.),<br>turn off 10s, continuous, self-recovery |       |      |      |
| Over-voltage Protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 12V                                     |                                     | ≤18VDC (Hiccup, self-recovery)                                                            |       |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 24V                                     |                                     | ≤35VDC (Hiccup, self-recovery)                                                            |       |      |      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 48V                                     |                                     | ≤60VDC (Hiccup, self-recovery)                                                            |       |      |      |
| Over-temperature Protection*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 230VAC,<br>rated load                   | Over-temperature protection start   | --                                                                                        | --    | 105  | ℃    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                         | Over-temperature protection release | 60                                                                                        | --    | --   |      |
| Note: 1. *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information;<br>2. *Over-temperature protection: Put the product into a high temperature box. After the ambient temperature stabilizes, increase the temperature slightly (3℃ to 5℃), and the load remains unchanged. After the product reaches thermal equilibrium, increase the temperature until the product triggers over-temperature protection;<br>3. *Power consumption curve, over-current protection mode and short circuit protection mode see product characteristic curve. |                                         |                                     |                                                                                           |       |      |      |

### General Specifications

| Item                  |                                                                                              | Operating Conditions                                                                                                   | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| Isolation Test*       | Input -   | Electric strength test for 1min., leakage current <5mA (Isolation Test need to remove the screw at the mark shall ⚡ *) | 2500 | --   | --   | VAC  |
|                       | Input - output                                                                               |                                                                                                                        | 4000 | --   | --   |      |
|                       | Output -  |                                                                                                                        | 500  | --   | --   |      |
|                       | DC OK - output                                                                               |                                                                                                                        | 500  | --   | --   |      |
| Insulation Resistance | Input -   | At 500VDC                                                                                                              | 500  | --   | --   | M Ω  |
|                       | Input - output                                                                               |                                                                                                                        | 500  | --   | --   |      |
|                       | Output -  |                                                                                                                        | 500  | --   | --   |      |
| Operating Temperature |                                                                                              |                                                                                                                        | -40  | --   | +85  | ℃    |
| Storage Temperature   |                                                                                              |                                                                                                                        | -40  | --   | +85  |      |
| Operating Humidity    |                                                                                              | Non-condensing                                                                                                         | 5    | --   | 95   | %RH  |
| Storage Humidity      |                                                                                              |                                                                                                                        | 5    | --   | 90   |      |

**MORNSUN®**

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.12.21-A/6

Page 2 of 10

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     |                                                                                           |                |                                                                                                                                              |    |     |       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------|----|-----|-------|
| Switching Frequency*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | PFC                                 |                                                                                           |                | 40                                                                                                                                           | -- | 130 | kHz   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | DC-DC                               |                                                                                           |                | 50                                                                                                                                           | -- | 130 |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Auxiliary source                    |                                                                                           |                | --                                                                                                                                           | 65 | --  |       |
| Power Derating                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Operating temperature derating      |                                                                                           | -40℃ to -25℃   | 3.34                                                                                                                                         | -- | --  | % /℃  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     |                                                                                           | +60℃ to +70℃   | 3.75                                                                                                                                         | -- | --  |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     |                                                                                           | +70℃ to +85℃   | 3.17                                                                                                                                         | -- | --  |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Input voltage derating              |                                                                                           | 85VAC - 100VAC | 1                                                                                                                                            | -- | --  | %/VAC |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Output voltage derating             | 48V                                                                                       | 53VDC-56VDC    | 6.67                                                                                                                                         | -- | --  | %/VDC |
| Leakage Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 240VAC                              | Input - output                                                                            |                | <0.5mA                                                                                                                                       |    |     |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     | Input -  |                | <0.88mA                                                                                                                                      |    |     |       |
| Safety Standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     |                                                                                           |                | EN62368-1, BS EN62368-1(Report)<br>Design refer to UL61010-1, IEC/UL62368-1, UL508, IEC60079-0, IEC60079-7, IEC60079-15, ANSI/ISA 71.04-2013 |    |     |       |
| Safety Class                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                     |                                                                                           |                | CLASS I                                                                                                                                      |    |     |       |
| MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MIL-HDBK-217F@25℃                   |                                                                                           |                | 980,000 h                                                                                                                                    |    |     |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | MIL-HDBK-217F@40℃                   |                                                                                           |                | 878,000 h                                                                                                                                    |    |     |       |
| Pollution degree                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                     |                                                                                           |                | 2                                                                                                                                            |    |     |       |
| Warranty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Ambient temperature: <40℃           |                                                                                           |                | 5 years                                                                                                                                      |    |     |       |
| High and Low Voltage Crossing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Test with Mornsun P/N: LUPS20-24F-N |                                                                                           |                | NB/T 31111-2017                                                                                                                              |    |     |       |
| Note: 1. *The gas discharge tube built into the device effectively protects the power supply against damage by asymmetric disturbance variables (eg EN 61000-4-5). Each power supply continuous withstand voltage test will cause extremely high load to the power supply. Therefore, unnecessary loading or damage to the power supply due to excessive test voltage should be avoided. If necessary, disconnect the gas discharge tube built into the device to use a higher test voltage. After successful completion of the test, reconnect the gas discharge tube. Please refer to the "LIMF240-23Bxx Installation and Application Manual" for specific operation methods;<br>2. *The power supply has three converters with three different switching frequencies. Auxiliary source frequency is nearly constant, other switching frequencies depend on input voltage and load. |                                     |                                                                                           |                |                                                                                                                                              |    |     |       |

## Environmental Characteristics

| Item                                | Operating Conditions                                                       | Standard                        |
|-------------------------------------|----------------------------------------------------------------------------|---------------------------------|
| High and Low Temperature Working    | +85℃, -40℃                                                                 | GB2423.1, IEC60068-2-1          |
| Sinusoidal Vibration                | 10 - 500Hz, 2g, three directions of X, Y, Z axis                           | GB2423.10, IEC60068-2-6         |
| Salt Mist                           | +35℃, 5%NaCl, 48h                                                          | GB2423.17, IEC60068-2-11        |
| Alternating Hot and Humid           | +25℃, 95%RH - +60℃, 95%RH                                                  | GB2423.4, IEC60068-2-30         |
| Low Temperature Storage             | -40℃                                                                       | GB2423.1, IEC60068-2-1          |
| High Temperature Storage            | +85℃                                                                       | GB2423.2, IEC60068-2-2          |
| High Temperature Aging              | +60℃                                                                       | GB2423.2, IEC60068-2-2          |
| Normal Temperature Aging            | +25℃                                                                       | GB2423.1, IEC60068-2-1          |
| Temperature Shock                   | -40℃ to +85℃                                                               | GB2423.22, IEC60068-2-14        |
| Temperature Cycle                   | -25℃ to +60℃                                                               | GB2423.22, IEC60068-2-14        |
| Hot and Humid                       | +85℃, 85%RH                                                                | GB2423.50, IEC60068-2-67        |
| High Temperature Elevation          | +60℃, 54KPa                                                                | GB2423.26, IEC60068-2-41        |
| Low Temperature Elevation           | -25℃, 54KPa                                                                | GB2423.25, IEC60068-2-40        |
| Constant Humid and Hot              | +40℃, 95%RH                                                                | GB2423.3, IEC60068-2-78         |
| Random Vibration                    | 5 - 10Hz, ASD 0.3 - 10g <sup>2</sup> /Hz, three directions of X, Y, Z axis | GB/T 4798.2-2008, IEC60721-3-2  |
| Sinusoidal Vibration Response       | 10 - 150Hz, 1g, three directions of X, Y, Z axis                           | GB/T 11287-2000, IEC60255-21-1  |
| Sinusoidal Vibration Endurance Test |                                                                            |                                 |
| Sinusoidal Impulse Response         | 15g, pulse duration 11ms, three times in each direction of X, Y, Z axis    | GB/T 114537-1993, IEC60255-21-2 |
| Sinusoidal Impact Endurance Test    |                                                                            |                                 |
| Packaging Drop                      | 1m, one corner, three edges and six sides                                  | GB2423.8, IEC68-2-32            |

### Mechanical Specifications

|                |                               |
|----------------|-------------------------------|
| Case Material  | Metal (AL5052, SUS304)        |
| Dimensions     | 124.00mm x 121.00mm x 48.00mm |
| Weight         | 870g (Typ.)                   |
| Cooling Method | Free air convection           |

### Electromagnetic Compatibility (EMC)

| EMC       | Item                        | Standard         | Range                                                          | Judge               |
|-----------|-----------------------------|------------------|----------------------------------------------------------------|---------------------|
| Emissions | CE (Input port)             | CISPR32 EN55032  | 150K - 30MHz                                                   | CLASS B             |
|           | CE (Output port)            | CISPR32 EN55032  | 150K - 30MHz                                                   | CLASS A             |
|           | RE                          | CISPR32 EN55032  | 30MHz - 2GHz                                                   | CLASS B             |
|           | Harmonic current            | IEC/EN61000-3-2  |                                                                | CLASS A and CLASS D |
|           | Voltage flicker             | EN61000-3-3      |                                                                |                     |
| Immunity  | ESD                         | IEC/EN61000-4-2  | Contact $\pm 8\text{KV}$ /Air $\pm 15\text{KV}$                | perf. Criteria A    |
|           | RS                          | IEC/EN61000-4-3  | 20V/m                                                          |                     |
|           | EFT (Input port)            | IEC/EN61000-4-4  | $\pm 4\text{KV}$                                               |                     |
|           | EFT (Output port)           | IEC/EN61000-4-4  | $\pm 2\text{kv}$                                               |                     |
|           | Surge (Input port)          | IEC/EN61000-4-5  | L to N $\pm 3\text{KV}$ /L or N to PE $\pm 6\text{KV}$         |                     |
|           | Surge (Output port)         | IEC/EN61000-4-5  | line to line $\pm 1\text{KV}$ /line to ground $\pm 2\text{KV}$ |                     |
|           | MS                          | IEC/EN61000-4-8  | 30A/m                                                          |                     |
|           | AC power port harmonics     | IEC61000-4-13    | CLASS 3                                                        |                     |
|           | Harmonic and network signal |                  |                                                                |                     |
|           | Low frequency immunity      |                  |                                                                |                     |
|           | CS                          | IEC/EN61000-4-6  | 0.15 - 80MHz 20Vr.m.s                                          |                     |
|           | Voltage dips                | IEC/EN61000-4-11 | 0% of 100Vac, 0Vac, 20ms                                       | perf. Criteria A    |
|           |                             |                  | 40% of 100Vac, 40Vac, 200ms                                    | perf. Criteria C    |
|           |                             |                  | 70% of 100Vac, 70Vac, 500ms                                    | perf. Criteria A    |
|           |                             |                  | 0% of 200Vac, 0Vac, 20ms                                       | perf. Criteria A    |
|           |                             |                  | 40% of 200Vac, 80Vac, 200ms                                    | perf. Criteria A    |
|           |                             |                  | 70% of 200Vac, 140Vac, 500ms                                   | perf. Criteria A    |
|           | Voltage interruption        | IEC/EN61000-4-11 | 0% of 200Vac, 0Vac, 5000ms                                     | perf. Criteria C    |

Note: perf. Criteria:

A: The equipment shall continue to operate as intended without operator intervention;

B: After the test, the equipment shall continue to operate as intended without operator intervention;

C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

### Product Characteristic Curve

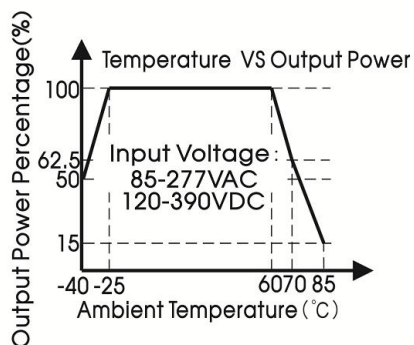


Figure 1

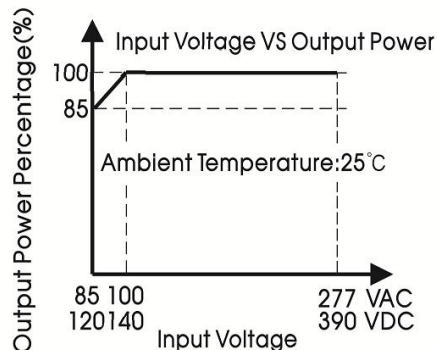


Figure 2

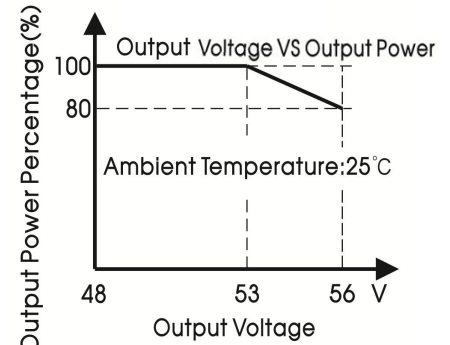


Figure 3

Output voltage VS Output current curve (Typ.)

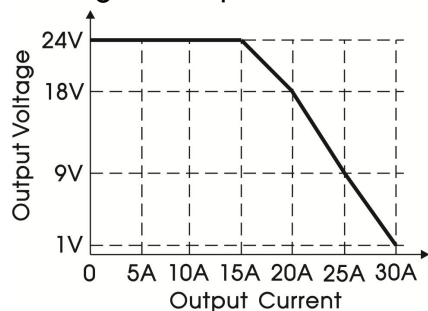


Figure 4

DC OK behavior curve (Typ.)

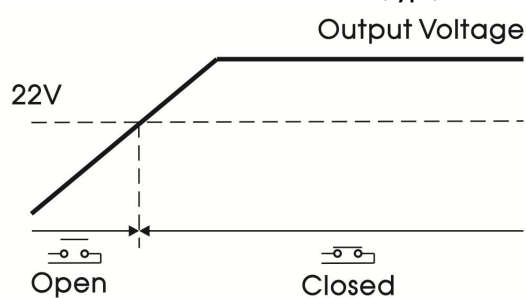


Figure 5

Over-current protection curve (Typ.)

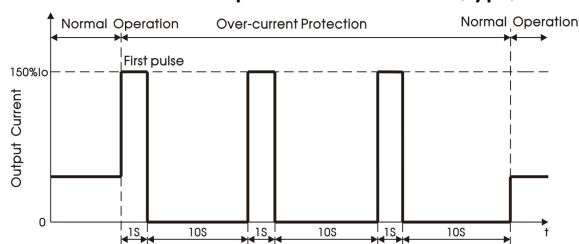


Figure 6

Short circuit protection curve (Typ.)

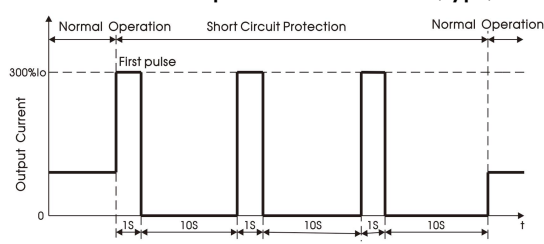


Figure 7

PF Vs Input Voltage (Full Load)

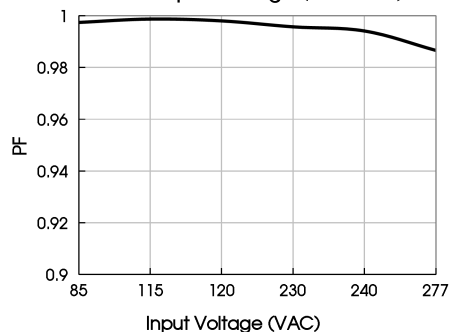


Figure 8

PF Vs Output Load (Vin=230VAC)

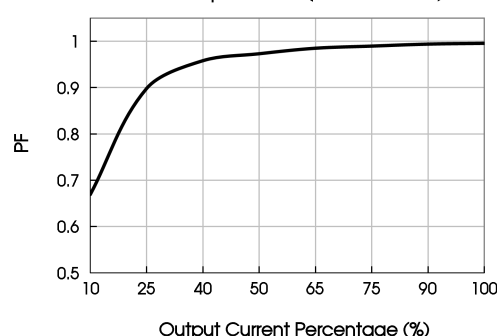


Figure 9

THD Vs Input Voltage (Full Load)

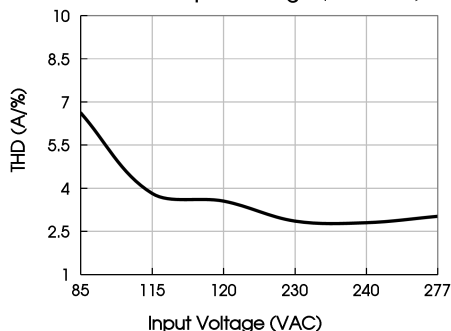


Figure 10

THD Vs Output Load (Vin=230VAC)

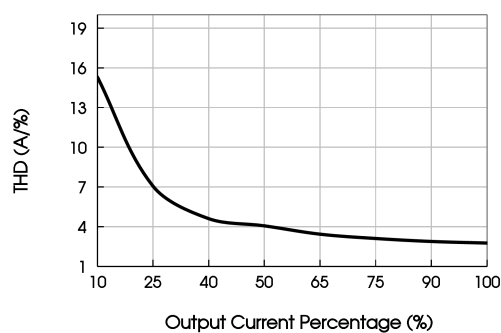


Figure 11

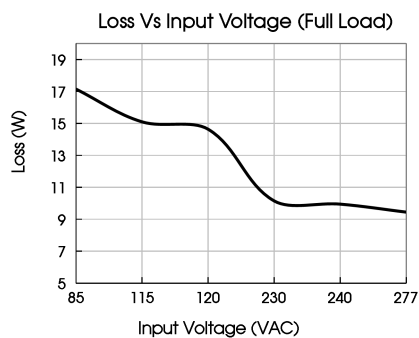


Figure 12

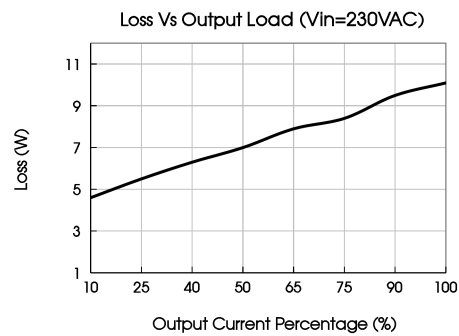


Figure 13

Note: 1. All curves are for 24V output, measured at input 230VAC, 50Hz, output  $I_o$ , ambient temperature 25°C, unless otherwise stated.

2. With an AC input voltage between 85-100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

3. This product is suitable for applications using natural air cooling, for applications in closed environment please consult Mornsun FAE.

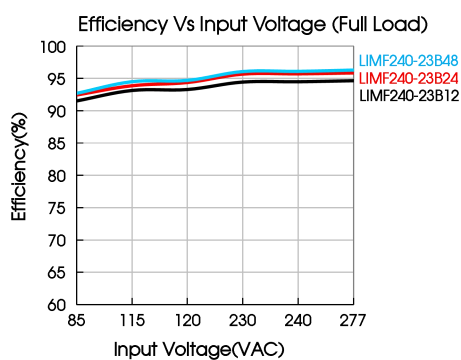


Figure 14




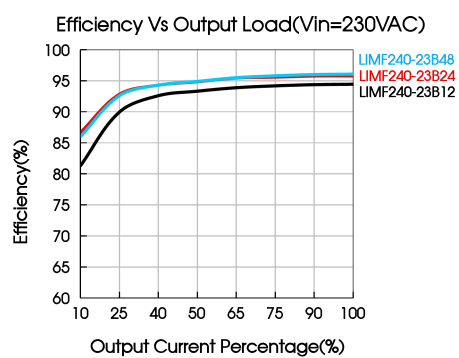


Figure 15


## Installation Diagram

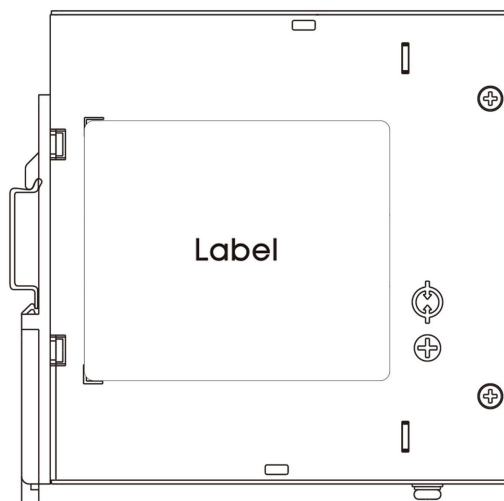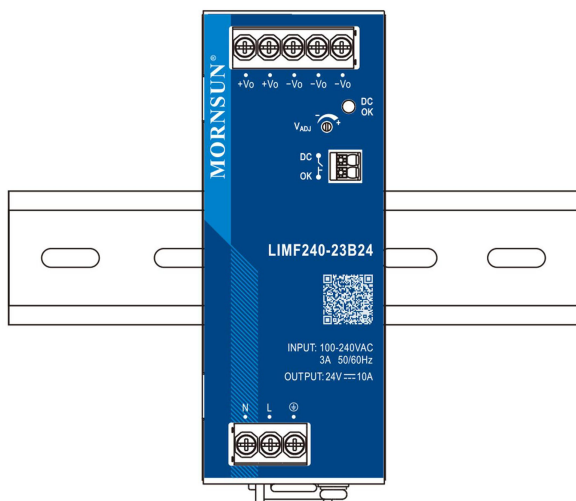


| Bill Of Material                                                                                                                        |                                             |       |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------|
| 1                                                                                                                                       | Product                                     | 1 PCS |
| 2                                                                                                                                       | Phillips screwdriver<br>Slotted screwdriver | 1 PCS |
| 3                                                                                                                                       | TS35/7.5 or TS35/15                         | 1 PCS |
| 4                                                                                                                                       | 24–10AWG wire                               | / PCS |
| The content is for reference only.<br>Regarding the actual wire diameter<br>and tightening torque, refer to the<br>dimensional drawing. |                                             |       |




Product



Phillips screwdriver  
Slotted screwdriver  
Diameter : 3mm




TS35/7.5 or TS35/15




24–10AWG wire

### Installation steps ①–②


① Clamp the buckle of the product into the TS35 DIN rail.

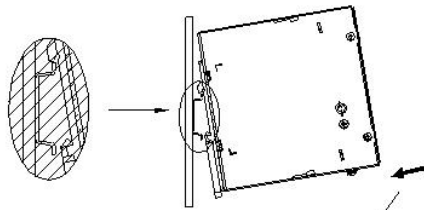


② Push the product vertically towards the TS35 DIN rail until hearing the sound of the buckle snapping into it.

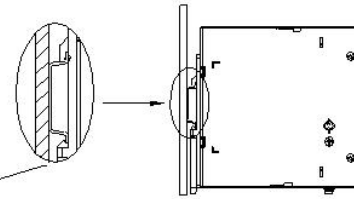

### Disassembly steps ③–④

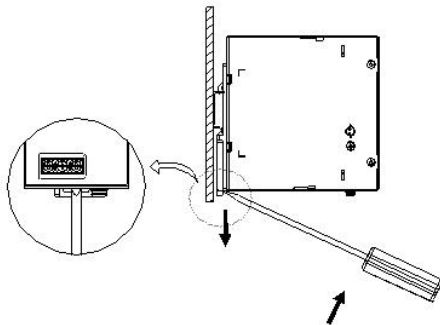


③ After inserting the slotted screwdriver into the square groove at the bottom of the buckle, push the slider of the buckle downward in the direction shown in the figure.

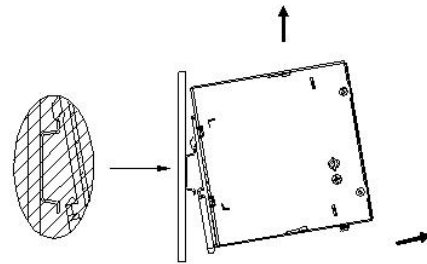


④ Hold the bottom of the product and push it outwards while pushing down the slider, then lift the product up to take the product out of the DIN rail.

### Wiring / Unwiring Steps ⑤–⑥

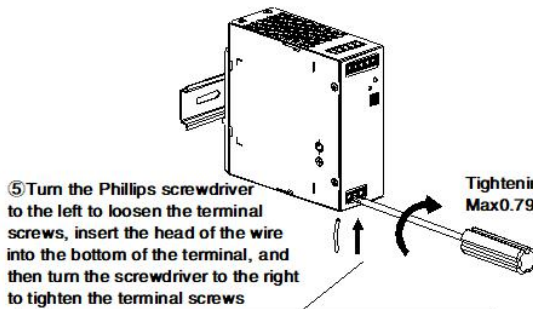


⑤ Turn the Phillips screwdriver to the left to loosen the terminal screws, insert the head of the wire into the bottom of the terminal, and then turn the screwdriver to the right to tighten the terminal screws

Tightening torque:  
Max0.79N · m(Reference);

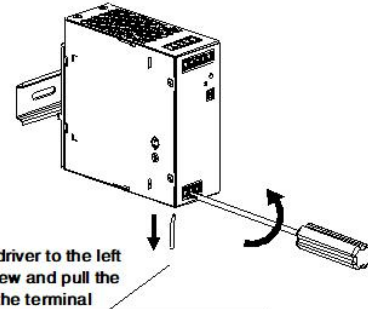


⑥ Turn the Phillips screwdriver to the left to loosen the terminal screw and pull the wire out of the bottom of the terminal


Note: Keep the following installation clearances: 20mm on top, 20mm on the bottom, 5mm on the left and right sides are recommended when the device is loaded permanently with more than 50% of the rated power. Increase this clearance to 15mm in case the adjacent device is a heat source (e.g. another power supply).

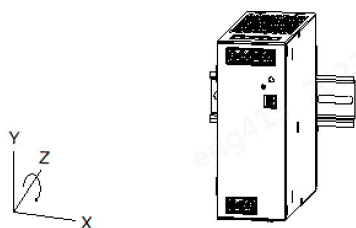


Rotate the installation position  
(0° Z-Axis)




Rotate the installation position  
(90° Z-Axis)

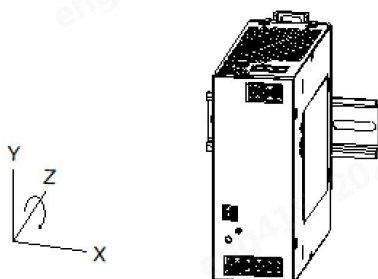






Rotate the installation position  
(180° Z-Axis)


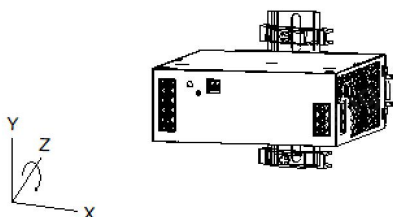


Rotate the installation position  
(270° Z-Axis)






Rotate the installation position  
(270° X-Axis)

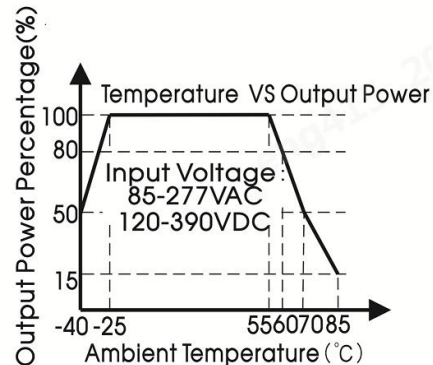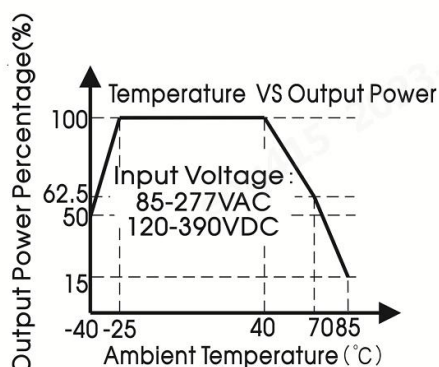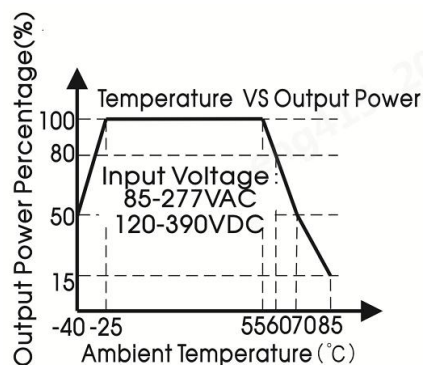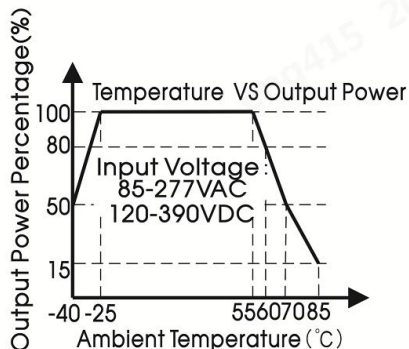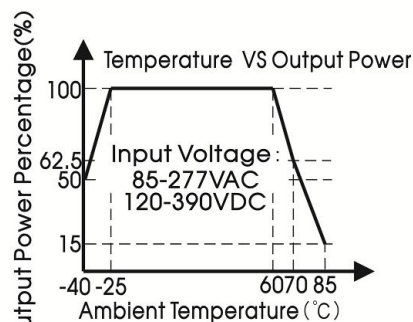


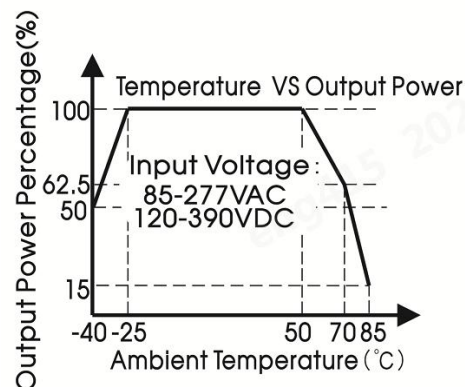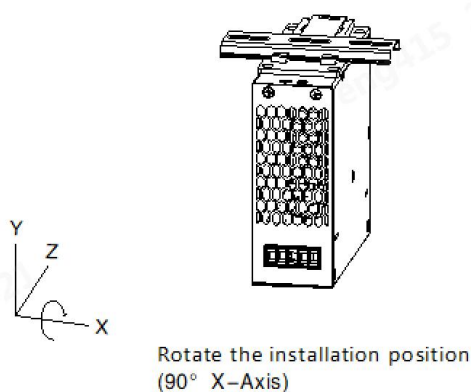

## Dimensions and Recommended Layout

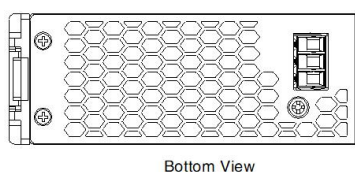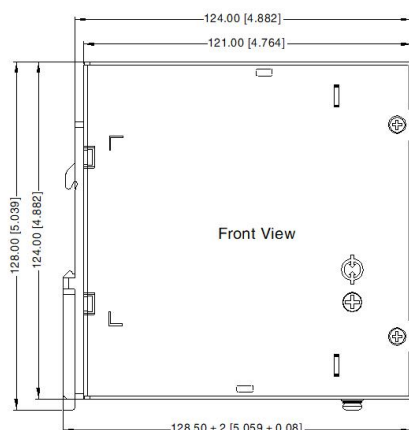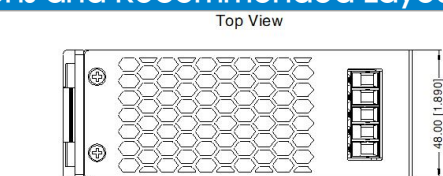

THIRD ANGLE PROJECTION

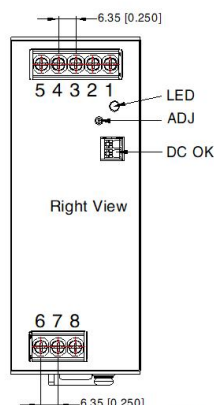

| Pin-Out |       |
|---------|-------|
| Pin     | Mark  |
| 1       | -Vo   |
| 2       | -Vo   |
| 3       | -Vo   |
| 4       | +Vo   |
| 5       | +Vo   |
| 6       | AC(N) |
| 7       | AC(L) |
| 8       | ⏏     |

Note:  
Unit: mm[inch]  
LED: Output status indicator LED  
ADJ: Output adjustable resistor  
Wire range: Input: 26-10AWG(12-10AWG for pin8)  
Output: 12V: 12-10AWG  
24V: 16-10AWG  
48V: 18-10AWG  
DC OK: 24-16AWG  
Tightening torque: Max 0.5N · m  
Mounting rail: TS35, rail needs to connect safety ground  
General tolerances: ± 1.00[± 0.039]



**WARNING** Risk of electrical shock, fire, personal injury or death:

**AVERTISSEMENT** AVERTISSEMENT Risque de choc électrique, d'incendie, de blessures corporelles ou de décès :

1. Do not use the power supply without proper grounding (Protective Earth). Use the terminal on the input block for earth connection and not one of the screws on the housing;  
N'utilisez pas l'alimentation électrique sans mise à la terre appropriée (Terre protectrice). Utilisez le terminal sur le bloc d'entrée pour la connexion terrestre et non pas une des vis sur le boîtier;
2. Turn power off before working on the device, protect against inadvertent re-powering;  
Éteignez l'alimentation avant de travailler sur l'appareil, protégez-vous contre la réenergisation accidentelle;
3. Make sure that the wiring is correct by following all local and national codes;  
Assurez-vous que le câblage est correct en suivant tous les codes locaux et nationaux;
4. Do not modify or repair the unit;  
Ne modifiez pas ou ne réparez pas l'appareil;
5. Do not open the unit as high voltages are present inside;  
Ne modifiez pas ou ne réparez pas l'appareil;
6. Use caution to prevent any foreign objects from entering the housing;  
Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;
7. Do not use in wet locations or in areas where moisture or condensation can be expected;  
Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;
8. Do not touch during power-on, and immediately after power-off, hot surfaces may cause burns;   
Ne touchez pas pendant l'alimentation et, immédiatement après l'alimentation, les surfaces chaudes peuvent causer des brûlures.
9. For ambient temperature  $\leq 60^{\circ}\text{C}$ , use  $\geq 90^{\circ}\text{C}$  - copper wire only; for ambient temperature  $> 60^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , use  $\geq 105^{\circ}\text{C}$  - copper wire only; use only wires with a minimum dielectric strength of 300V (input) and 60V (output);  
Température ambiante  $\leq 60^{\circ}\text{C}$ , utiliser  $\geq 90^{\circ}\text{C}$  - seulement fils de cuivre; Température ambiante  $> 60^{\circ}\text{C}$  et  $85^{\circ}\text{C}$ , utiliser  $\geq 105^{\circ}\text{C}$  - seulement fils de cuivre; Uniquement pour l'utilisation de fils de cuivre d'une résistance d'isolation minimale de 300V (d'entrée) et 60V (de sortie).

Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220282;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity  $<75\%$  RH with nominal input voltage and rated output load;
3. The room temperature derating of  $5^{\circ}\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to PE ( $\oplus$ ) of system when the terminal equipment in operating;
9. The output voltage can be adjusted by the ADJ, clockwise to increase;
10. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)