



RoHS



FEATURES

- Universal 85 - 264VAC or 120 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- High I/O isolation test voltage up to 4000VAC
- High efficiency, low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Operating altitude up to 5000m
- 3 years warranty

LM150-10D1224-32(-C) is one of Mornsun's dual output non-isolation enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, high efficiency, high reliability and double or reinforced insulation. And integrated a variety of protection functions, with high cost-effective. The converter offers excellent EMC performance and meets IEC/EN61000-4, CISPR32/EN55032, UL/IEC/EN/BS EN62368, GB4943, IEC/EN60335, IEC/EN61558 standards and it is not only used in areas of industry control, electricity, security, telecommunications, smart home, etc.

Selection Guide

| Part No.* | Cooling Method | Output Power (W) | Nominal Output Voltage and Current | | Output Voltage Adjustable Range (Vo1)** | Efficiency at 230VAC (%) Typ. | Max. Capacitive Load (uF) | |
|------------------|----------------|------------------|------------------------------------|------------|---|-------------------------------|---------------------------|------|
| | | | Vo1/Io1 | Vo2/Io2 | | | Vo1 | Vo2 |
| LM150-10D1224-32 | Air cooling | 150 | +12V/6A | +24V/3.25A | 11.4V-12.6V | 86 | 2000 | 1200 |

Note:

1. *Use suffix "C" for terminal with protective cover; The product picture is for reference only. For details, please refer to the actual product.
2. Under any steady-state conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current.
3. **Output voltage adjustable range test conditions: 230VAC, 50% Io.

Input Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-------------------------|----------------------|------------|-------------|------|------|------|
| Input Voltage Range | AC input | | 85 | -- | 264 | VAC |
| | DC input | | 120 | -- | 370 | VDC |
| Input Voltage Frequency | AC input | | 47 | -- | 63 | Hz |
| Input Current | 115VAC | | -- | -- | 4 | A |
| | 230VAC | | -- | -- | 2 | |
| Inrush Current | 115VAC | Cold start | -- | 30 | -- | |
| | 230VAC | | -- | 50 | -- | |
| Start-up Delay Time | rated load | | -- | -- | 1 | s |
| Input Fuse | Built-in fuse | | -- | 6.3 | -- | A |
| Hot Plug | | | Unavailable | | | |

Output Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-------------------------|---|-----|------|------|------|------|
| Output Voltage Accuracy | Full load range (Balanced load) | Vo1 | -- | ±2 | -- | % |
| | | Vo2 | -- | ±3 | -- | |
| Line Regulation | Rated load (Balanced load) | Vo1 | -- | ±1 | -- | |
| | | Vo2 | -- | ±3 | -- | |
| Load Regulation | 10% - 100% load (Balanced load) | Vo1 | -- | ±1 | -- | |
| | | Vo2 | -- | ±3 | -- | |
| Cross Regulation | Full input voltage range (no-balanced load) | | -- | -- | 10 | |
| Minimum Load | | | 10 | -- | -- | |
| Ripple & Noise* | 20MHz bandwidth (peak-peak value) | Vo1 | -- | -- | 100 | mV |
| | | Vo2 | -- | -- | 200 | |

AC/DC 150W Enclosed Switching Power Supply

LM150-10D1224-32(-C)

MORNSUN®

| | | | | | | |
|--|--|-----|--------------------------------------|-------|----|------|
| Temperature Coefficient | | | -- | ±0.03 | -- | %/°C |
| Hold-up Time | 230VAC | | -- | 20 | -- | ms |
| Short Circuit Protection | Recovery time <5s after the short circuit disappear. | | Hiccup, continuous, self-recover | | | |
| Over-current Protection | | | 120% - 200% Io, hiccup, self-recover | | | |
| Over-voltage Protection | 12V output | Vo1 | ≤18VDC (Hiccup, self-recover) | | | |
| | 24V output | Vo1 | ≤33.6VDC (Hiccup, self-recover) | | | |
| Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information. | | | | | | |

General Specifications

| Item | | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-----------------------|----------------|---|----------------|--|------|------|------|
| Isolation | Input - ⊕ | Electric strength test for 1min., leakage current <5mA | | 2000 | -- | -- | VAC |
| | Input - output | | | 4000 | -- | -- | |
| | Output - ⊕ | | | 500 | -- | -- | |
| | Vo1 - Vo2 | | | 500 | -- | -- | VDC |
| Insulation Resistance | Input - ⊕ | Ambient temperature: 25 ± 5℃ Relative humidity: < 95%RH, no condensation Test voltage: 500VDC | | 100 | -- | -- | M Ω |
| | Input - output | | | 100 | -- | -- | |
| | Output - ⊕ | | | 100 | -- | -- | |
| Operating Temperature | | | | -30 | -- | +70 | ℃ |
| Storage Temperature | | | | -40 | -- | +85 | |
| Operating Humidity | | Non-condensing | | -- | -- | 95 | %RH |
| Storage Humidity | | | | -- | -- | 75 | |
| Switching Frequency | | | | -- | 65 | -- | kHz |
| Power Derating | | Operating temperature derating | +50℃ to +70℃ | 2.5 | -- | -- | % /℃ |
| | | Input voltage derating | 85VAC - 110VAC | 2 | -- | -- | |
| | | Altitude derating | 2000m - 5000m | 5 | -- | -- | ℃/Km |
| Leakage Current | | 240VAC, 60Hz | Touch current | ≤0.5mA | | | |
| Safety Standards | | | | Design refer to UL/IEC/EN/BS EN62368-1, GB4943.1, IEC/EN60335-1, IEC/EN61558-1 | | | |
| Safety Class | | | | CLASS I | | | |
| MTBF | | MIL-HDBK-217F@25℃ | | ≥300,000 h | | | |
| Warranty | | Ambient temperature: <50℃ | | 3 years | | | |

Environmental Characteristics

| Item | Operating Conditions | Standard |
|----------------------------------|--|-------------------------|
| High and Low Temperature Working | +70°C, -30°C | GB2423.1, IEC60068-2-1 |
| Sinusoidal Vibration | 10-500Hz, 5g, 60 minutes in each direction of X, Y, Z axis | GB2423.10, IEC60068-2-6 |
| Low Temperature Storage | -40°C | GB2423.1, IEC60068-2-1 |
| High Temperature Storage | +85°C | GB2423.2, IEC60068-2-2 |
| Packaging Drop | 1m, one corner, three edges and six sides | GB2423.8, IEC68-2-32 |

General Specifications

| | |
|----------------|--------------------------|
| Case Material | Metal (AL1100, SGCC) |
| Dimensions | 159.00 x 97.00 x 30.00mm |
| Weight | 450g (Typ.) |
| Cooling Method | Air cooling |

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2025.07.05 - A/2

Page 2 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



Electromagnetic Compatibility (EMC)

| | | | | |
|-----------|-----------------------|---|--|------------------|
| Emissions | CE | CISPR32/EN55032 CLASS B | | |
| | RE | CISPR32/EN55032 CLASS B | | |
| Immunity | ESD | IEC/EN61000-4-2 Contact ±6KV/Air ±8KV | | perf. Criteria A |
| | RS | IEC/EN61000-4-3 10V/m | | |
| | EFT | IEC/EN61000-4-4 ±2KV | | |
| | Surge | IEC/EN61000-4-5 Line to line ±1KV/line to PE ±2KV | | |
| | CS | IEC/EN61000-4-6 10Vr.m.s | | |
| | PMS | IEC/EN61000-4-8 30A/m | | |
| | Voltage variation* | IEC61000-6-2/IEC61000-4-11 | 70% Un, 25/30 cycle(50/60Hz) 40% Un, 10/12 cycle(50/60Hz) 0% Un, 1 cycle | perf. Criteria B |
| | Voltage interruption* | IEC61000-6-2/IEC61000-4-11 | 0% Un, 250/300 cycle(50/60Hz) | perf. Criteria C |

Note:



- perf. Criteria:
 - A: The equipment shall continue to operate as intended without operator intervention;
 - B: After the test, the equipment shall continue to operate as intended without operator intervention;
 - C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.
- This power supply does not meet the harmonic current requirements specified in EN61000-3-2.
Please do not use this power supply under the following conditions:
 - (1) The terminal equipment is used in the European Union.
 - (2) Supporting terminals are connected to a public power grid with 220VAC or a higher voltage that comply with the requirements of EN61000-3-2.
 - (3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W.
 - (4) The power supply belong to a part of lighting system.
 Exception: The power supply used in the following terminal equipment does not need to meet EN61000-3-2.
 - (1) Professional equipment with a total rated input power greater than 1000W.
 - (2) Symmetrically controlled heating element with a rated power less than or equal to 200W.
- If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.
- *Un is the maximum input nominal voltage.

Product Characteristic Curve

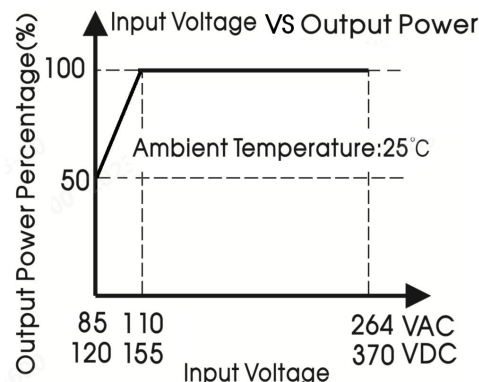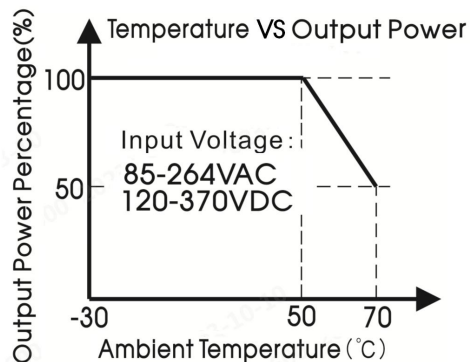


Note:

- With an AC input voltage between 85-110VAC and a DC input between 120-155VDC the output power must be derated as per the temperature derating curves;
- This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

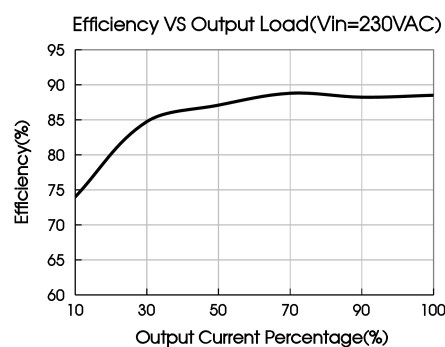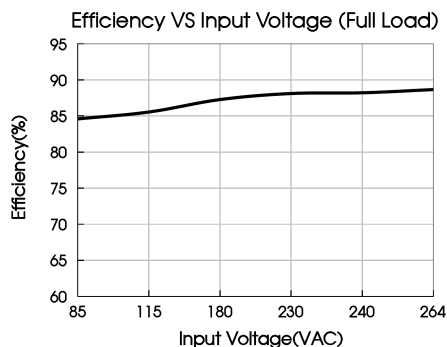


Dimensions and Recommended Layout

LM150-10D1224-32

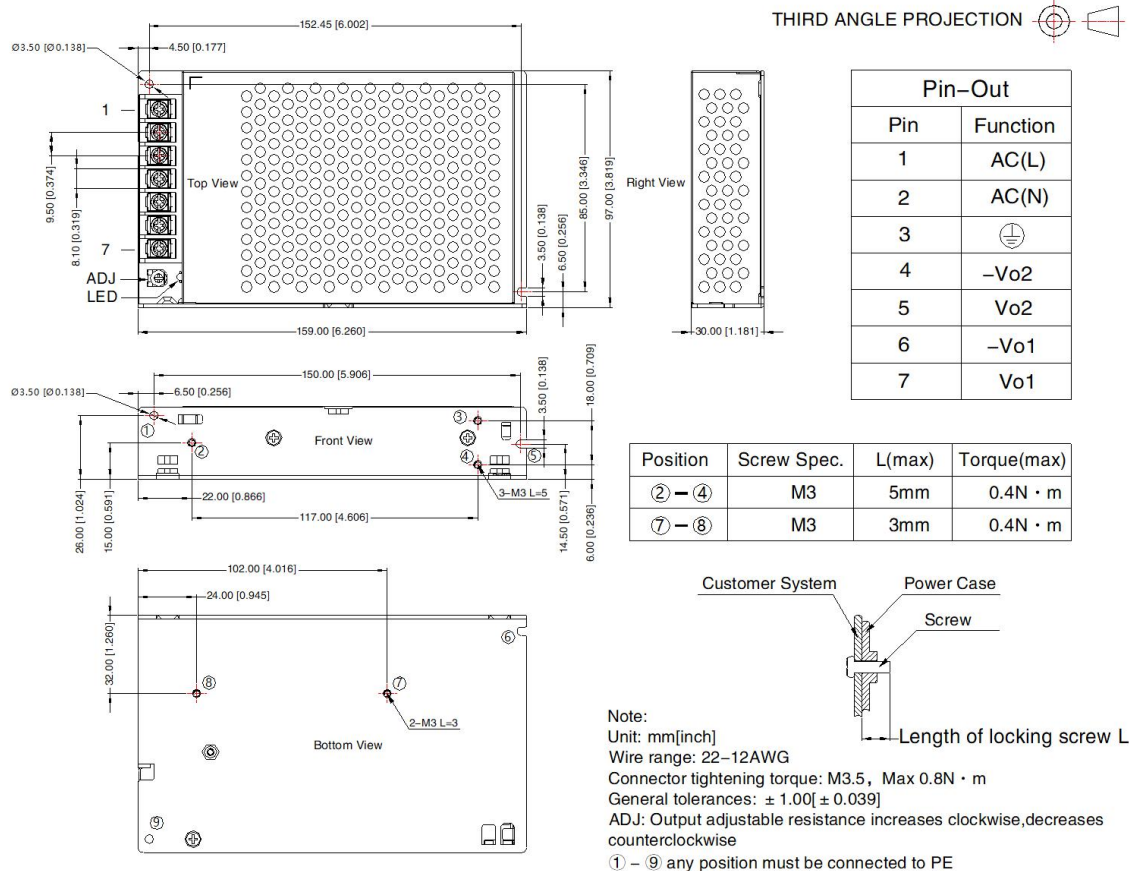

LM150-10D1224-32-C

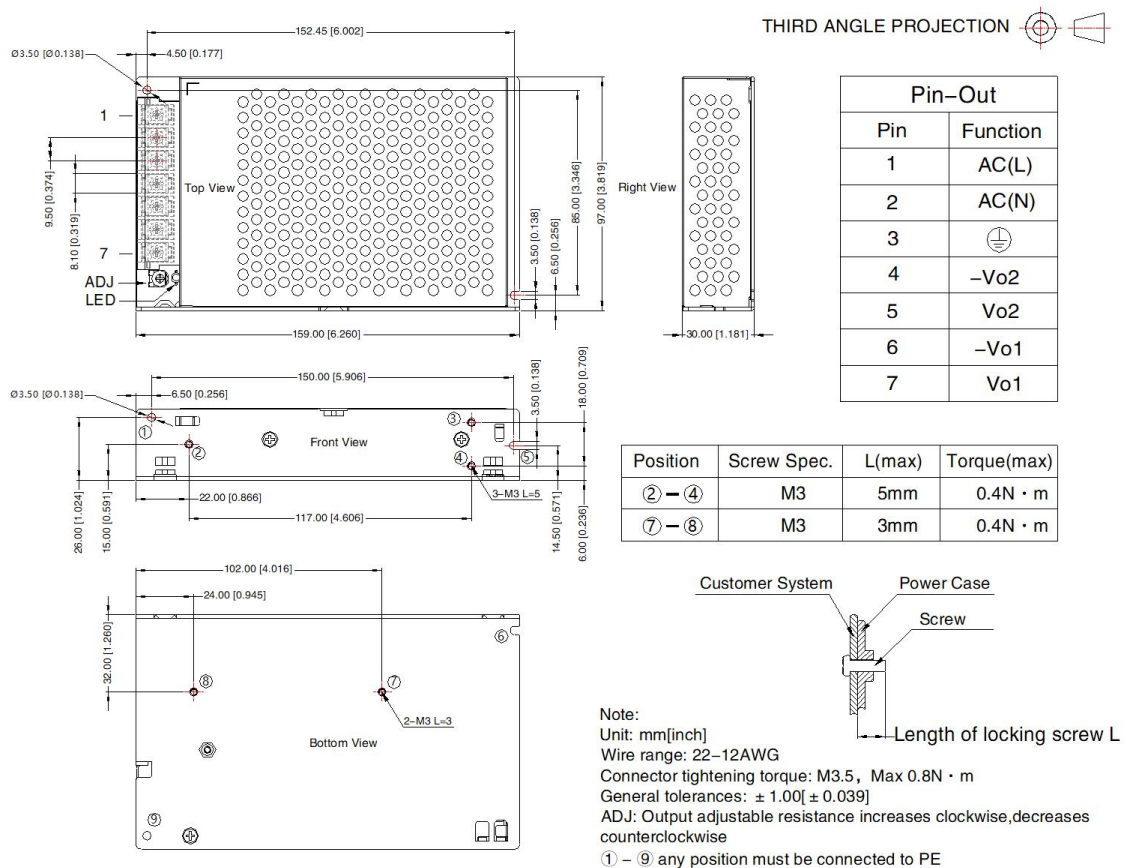

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220111;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity $<75\%\text{RH}$ with nominal input voltage and rated output load;
3. The room temperature derating of $5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to PE (\oplus) of system when the terminal equipment in operating;
9. The output voltage can be adjusted by the ADJ, clockwise to increase;
10. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
11. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com