



RoHS



## FEATURES

- Universal 85 - 264VAC or 120 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30℃ to +70℃
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Operating altitude up to 5000m
- OVC III
- 3 years warranty

LM75-20B09 is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. The converter offers excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, EN60335, GB4943 standards and it's widely used in areas of industrial, LED, street light control, security, telecommunications, smart home etc.

## Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (uF)
CCC	LM75-20B09	72	9V/8A	8.0-10.0	86	8000

Note:

1. \*Use suffix "C" for terminal with protective cover.
2. The product picture is for reference only. For details, please refer to the actual product.

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	2	A
	230VAC		--	--	1	
Inrush Current	115VAC	Cold start	--	40	--	
	230VAC		--	65	--	
Leakage Current	240VAC		<0.75mA			
Hot Plug			Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	--	±2	--	%
Line Regulation	Rated load	--	±0.5	--	
Load Regulation	0% - 100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	100	--	mV
Temperature Coefficient	0℃ to 50℃, 230VAC	--	±0.03	--	%/℃
Minimum Load		0	--	--	%
Stand-by Power Consumption		--	--	0.3	W
Hold-up Time	115VAC	8	--	--	ms
	230VAC	55	--	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.	Hiccup, continuous, self-recovery			
Over-current Protection		110%-200% Io, self-recovery			
Over-voltage Protection		≤16.0VDC (Hiccup, self-recovery)			

# AC/DC 75W Enclosed Switching Power Supply

## LM75-20B09, LM75-20B09-C

# MORNSUN®

Note: "The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

### General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <10mA		2000	--	--	VAC
	Input - output			4000	--	--	
	Output - ⊕			1250	--	--	
Insulation Resistance	Input - ⊕	At 500VDC		100	--	--	M Ω
	Input - output			100	--	--	
	Output - ⊕			100	--	--	
Operating Temperature				-30	--	+70	℃
Storage Temperature				-40	--	+85	
Operating Humidity		Non-condensing		20	--	90	%RH
Storage Humidity				--	--	95	
Switching Frequency				--	65	--	kHz
Power Derating		Operating temperature derating	+50℃ to +70℃	2	--	--	%/℃
		Input voltage derating	85VAC-100VAC	1.33	--	--	%/VAC
Safety Standard		GB4943.1 safety approved; Design refer to IEC/EN/UL62368-1, EN60335-1					
Safety Class		CLASS I					
MTBF		MIL-HDBK-217F@25℃		>300,000 h			

### Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	99.00mm x 97.00mm x 30.00 mm
Weight	220g (Typ.)
Cooling Method	Free air convection

### Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	±2KV	perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line ±2KV/line to PE ±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

## MORNSUN®



MORNSUN Guangzhou Science & Technology Co., Ltd.

2025.09.16-A/3

Page 2 of 4



MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

### Product Characteristic Curve

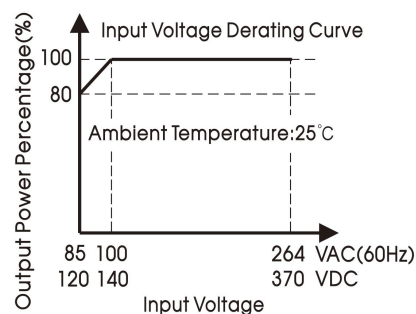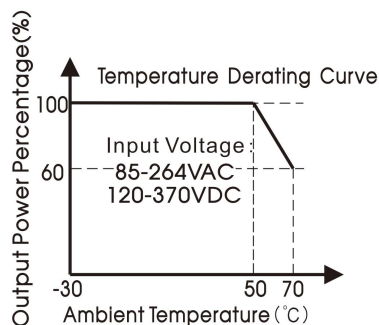

Note: 1. With an AC input voltage between 85 - 100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;



2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

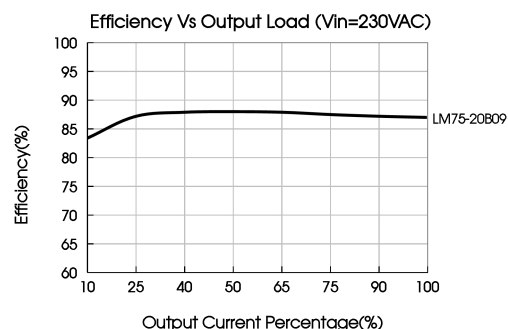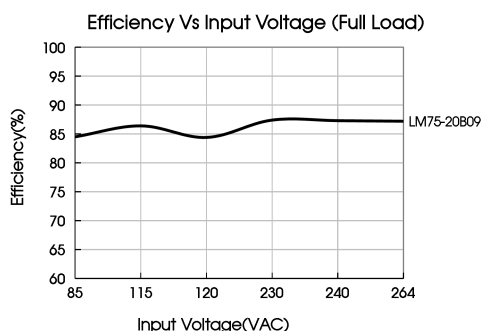

### Dimensions and Recommended Layout

#### LM75-20B09


THIRD ANGLE PROJECTION

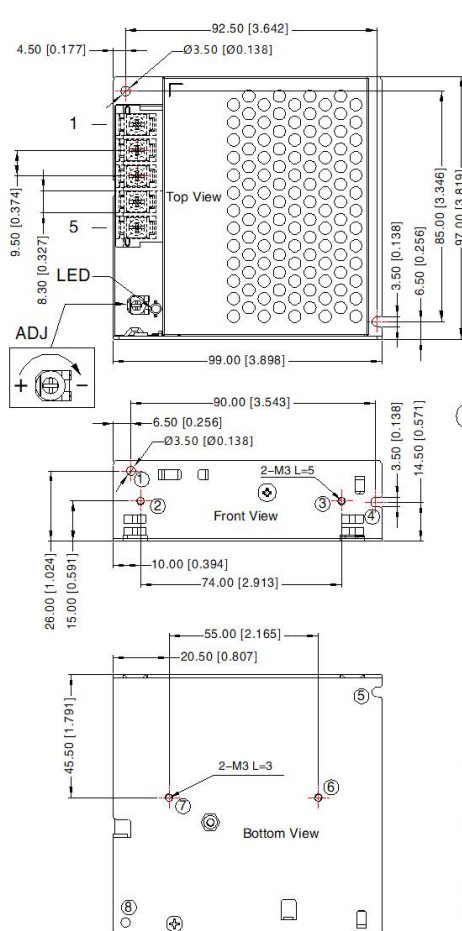

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊥
4	-Vo
5	+Vo

① - ⑧ any position must be connected to the earth (⊥)

Position	Screw Spec.	Length of locking screw L(max)	Torque
② - ③	M3	5mm	0.4N · m ± 10%
⑥ - ⑦	M3	3mm	0.4N · m ± 10%

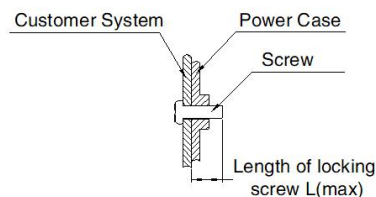

Note:

Unit: mm[inch]

ADJ: Output adjustable resistor


Wire range: Input: 22-12AWG

Output: 18-10AWG

Connector tightening torque: M3.5, 0.8N · m ± 10%

General tolerances: ± 1.00 [± 0.039]

### LM75-20B09-C

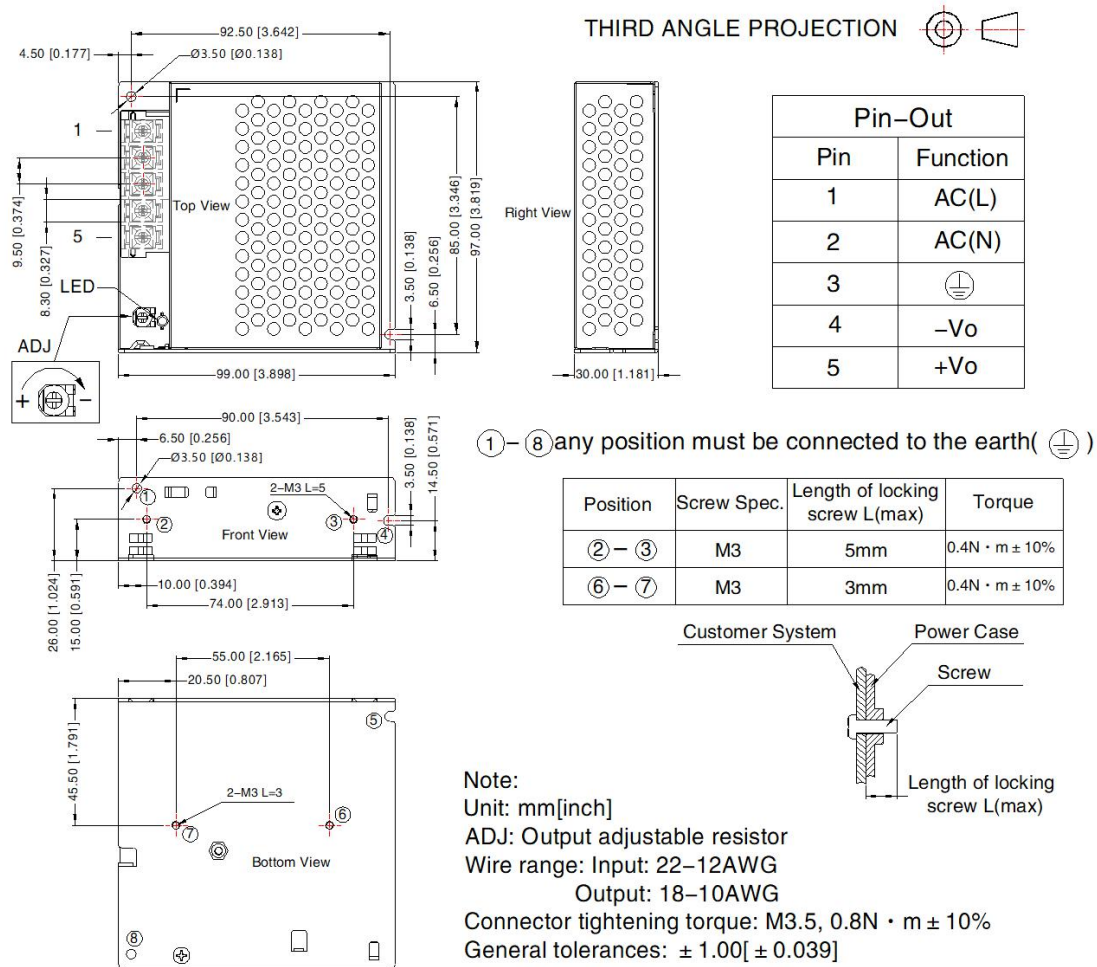

#### Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220119;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75% RH with nominal input voltage and rated output load;
- The room temperature derating of 5℃/1000m is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⏏) of system when the terminal equipment in operating;
- The output voltage can be adjusted by the ADJ, clockwise to decrease;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

## Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No.8 Nanyun 4th Road, Huangpu District, Guangzhou, China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)

[www.mornsun-power.com](http://www.mornsun-power.com)